


THORN

Yardlight S/M/L LED

IP65  



Installation and wiring instructions

Please read these instructions carefully before installation or lamp replacement. Warranty of this product is subject to installation and maintenance being carried using appropriate conventional practices and/or any specific instructions enclosed within.

Installation

To be carried out by a qualified tradesperson in accordance with local wiring regulations. Ensure that the rated voltage and frequency of the luminaire is compatible with the electrical supply. Unless otherwise indicated on labelling this fitting is suitable for normal ambient temperature conditions of 25°C.

Important

Disconnect mains supply before installing, servicing or maintaining the luminaire.

Specification

These luminaires are designed to comply with AS/NZS60598 and installed in accordance with AS/NZS3000.

Classification for protection

Against electric shock:- Class 1 earthed metalwork. This luminaire must be earthed.


Changes to design

The right is reserved to change the design and/or specification without prior notice or public announcement.

Warranty

In addition to normal Thorn conditions of warranty, this LED product can only be serviced by Thorn or an approved service agent.

Product Structure

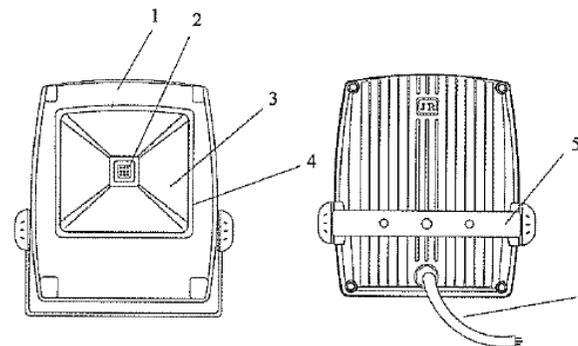

1 — Lamp body 2 — LED 3 — Reflector
4 — Glass 5 — Bracket 6 — Cable conductor

Parameters

Model	Voltage/ Frequency	Wattage	Power Factor	Nominal Initial Lumens	Weight	Size (mm)
Yardlight S	240V/50Hz	10W	>0.9	720 lm	1.1 Kg	146x53x171
Yardlight M	240V/50Hz	36W	>0.9	2400 lm	3.2 Kg	222x80x279
Yardlight L	240V/50Hz	55W	>0.9	4000 lm	5.3 Kg	290x340x100

Installation and usage


In accordance with AS3000 install outside arm's reach (&/or a min. of 2.5M from ground level)

Ensure aiming screws are adjusted firmly.

Connect MAINS cable as indicated, ie - L – Active  - Earth N - Neutral

NOTES

This product has electronic componentry, handle with care.
Check contents on opening
Tighten any adjusting screws as required
When illuminated, the surface of this product will become hot.
Ensure the product is in good condition before installation.
Do NOT pull or carry the product by the incoming power cable



Thorn Lighting Pty Limited
A.B.N 74 060 142 501
Telephone 1300 139 965
www.thornlighting.com.au

Thorn Lighting (NZ) Limited
Telephone (09) 828 7155
www.thornlighting.co.nz