

THORN
LIGHTING



POPPACK

Fast. Simple. Affordable.



MORE INFORMATION
ABOUT POPPACK
thornlighting.com/POPL



POPPACK

SAVE TIME. SAVE MONEY. SAVE ENERGY.

Made in UK, PopPack is the perfect one-for-one LED replacement for single and twin fluorescent battens, and the simple, efficient solution for new installations. It is ideal for office, industry and retail applications where corridors, storages, service rooms, general circulation and other functional rooms can be found. With our comprehensive portfolio you can realise both large and small projects in a fast, cost-effective and energy-efficient manner.

APPLICATIONS



STORAGES



CORRIDORS &
CIRCULATION
AREAS



SERVICE
ROOMS

EASY INSTALLATION



01 Open luminaire by unclipping front spine



02 Bring power cable through cable entry, fix base tray to mounting surface



03 Attach suspension cord between base tray and front spine



04 Connect power cable to terminal block




05 Close luminaire by clipping front spine onto base tray




Flexibility and efficiency

PopPack gives flexibility in lighting design for both new and refurbishment projects through the offer of four lengths and ten lumen outputs. With an efficacy of up to 147 lm/W, PopPack makes it possible to fulfil different illumination requirements whilst minimising energy use.

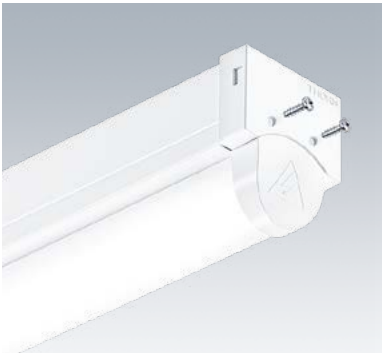

Simple and secure

PopPack's click-in system enables fast and simple installation. Slots in the spine make alignment easy. Multiple cable entries and terminal blocks with capacity for loop-in/loop-out 2.5 mm² wires. Optional screws can be added to end caps to lock the housing, restricting access to components to ensure increased security.

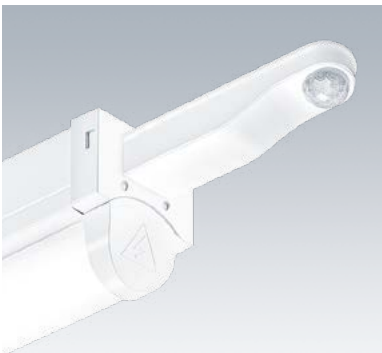

Controls and emergency


PopPack slashes maintenance costs, with a 50000-hour rated life, equivalent to 16 years at 12 hours per day, 5 days per week operation. Additional savings can be achieved via DALI control or an integral PIR sensor, as well as corridor function. A self-contained 3-hour emergency version is also available.

TECHNICAL DATA



<p>50 000 HOURS L80 @Ta 25°C</p>	<p>IP20</p>	<p>WIDE BEAM</p>	<p>IK03</p>	<p>E3, E3D (ON REQUEST)</p>	<p>PIR SENSOR, DALI DIMMABLE, CORRIDOR FUNCTION (COZ AND COR ON REQUEST)</p>
<p>UP TO 147 lm/W</p>	<p>1700 lm, 2300 lm, 3000 lm 4500 lm, 5000 lm, 6000 lm 6500 lm, 7000 lm, 9000 lm 11 000 lm</p>	<p>4 LENGTHS: 600 mm, 1200 mm 1500 mm, 1800 mm</p>	<p>3000K 4000K</p>	<p>-20°C / +25°C (0°C / +25°C FOR EMERGENCY VERSION)</p>	<p>CRI 80</p>

INSTALLATION

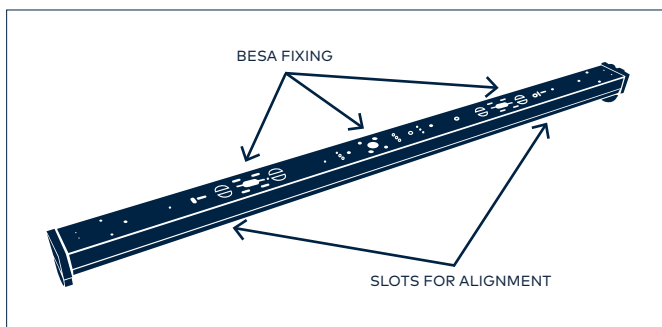

MATERIAL

Batten:
pre-coated roll form steel,
white (RAL9016)

End caps/lamp holders:
injection moulded
polycarbonate, white

Diffuser:
textured opal acrylic


ACCESSORIES

SCREW KIT x20
(59010828)


SCREW KIT x100
(59010829)

WIRE SUSPENSION KIT 2M
(96627711)

DIMENSIONS



MOUNTING



- 01 Ceiling
- 02 Suspended
- 03 Vertical wall
- 04 Horizontal wall

Configure a lighting solution with myProduct. The myProduct configurator allows you to quickly and easily configure a lighting solution.

Try it now at www.thornlighting.com/myproduct



5 YEAR
GUARANTEE

As a globally leading luminaire manufacturer, Thorn Lighting provides a five-year warranty for its complete product range within all European Countries.
thornlighting.com/guarantee

Thorn Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.
10/2020 (INT)

**WE
MAKE
LIGHT
WORK**