Porto LED

96542307 <PORTO LED 20W HF MWS L840

AS/NZS 60598	IP 54			T_a25

Porto LED

An eco-friendly LED surface mounted luminaire with Electronic, fixed output control gear. Body:die-cast aluminium painted black. Reflector: Polyethylene Terephthalate (PET). Diffuser: opal polycarbonate. Class I electrical. IP54. Electrical connection via 3 x 1mm² terminal block. Complete with 4000K LED. With power reduction function.

Dimensions: Ø275 x 83 mm
Luminaire input power: 20 W
Weight: 1 kg

TLA_PORT_F_PORT.jpg

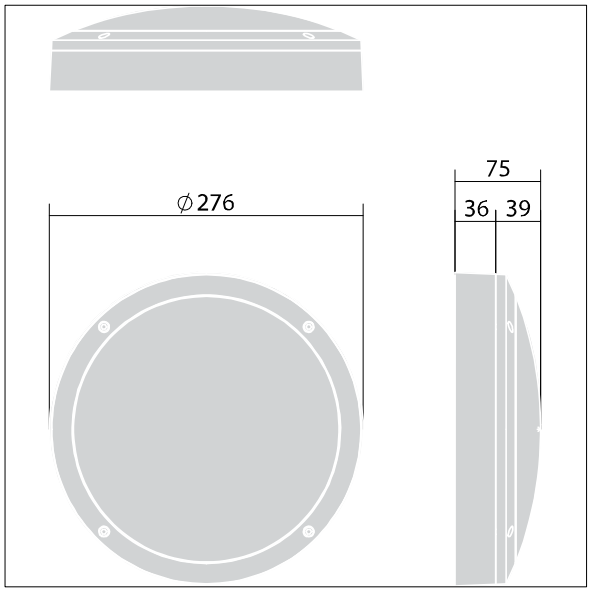

TLAU_PORT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting