THORN

22668262 <CHAMPION PRO 132L A45 CL1 L757 MC

IP66 | IK08 | 1,5m | T_a35

A high powered LED floodlight with asymmetrical 45° light distribution(s) from 132 LEDs. External control gear to be ordered separately. Class I electrical, IP66, IK08. Body: die-cast aluminium painted dark sandy grey (close to RAL 7043). Frame and Stirrup: galvanised steel painted dark sandy grey (close to RAL 7043). Stirrup fixed by a single bolt through Ø22mm hole or 105x17mm oblong hole, or by twin bolts through Ø15mm holes. Glass: 5mm toughened. Screws: Stainless steel. Complete with Metal conduit.

Tiltable LED modules allow optimisation of lighting designs. Precision aiming device is adjustable on top or bottom of LED modules (to be ordered separately). Complete with 5700K LED, Colour Rendering Index min.: 70.

Due to the unique calculation requirements of this product the photometric data is not provided here but design advice may be obtained from your local representative.

TLG_CHIPP_F_1.jpg

Luminaire input power: 447 W
Total luminous flux: 50397 lm
Dimensions: 770 x 369 x 185 mm
Weight: 19 kg
Scx: 0.065 m²

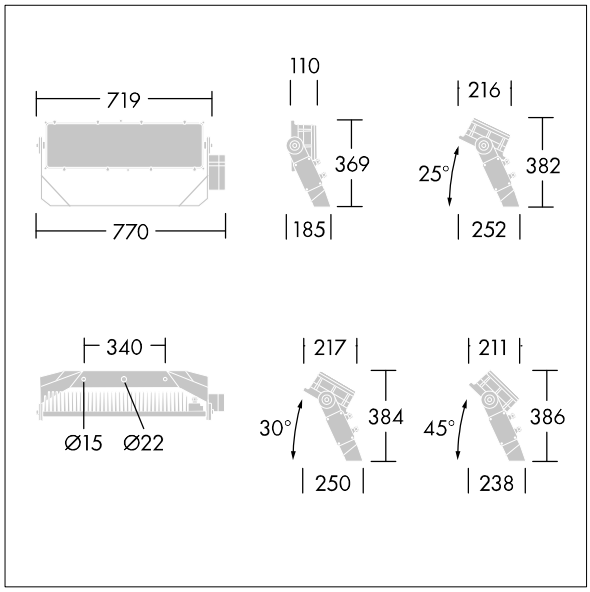

TLG_CHPP_M_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting