



## Guardian Surface Prismatic

### Surface mount linear fluorescent luminaire with simple construction

- High frequency electronic control gear
- Available in 1200mm and 600mm sizes
- Tough injection moulded prismatic UV resistant polycarbonate diffuser
- Close ceiling or wall mount resists prising from surface improving vandal resistance
- Stainless steel security screws



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

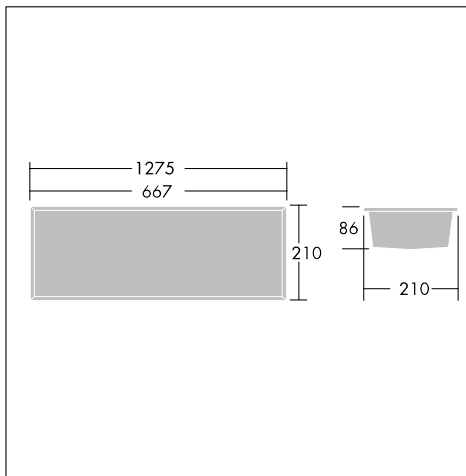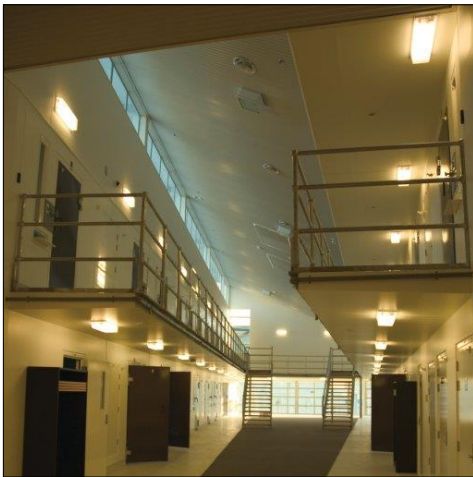

### Material/Finish

Body: 1.6mm mild steel; electro plated (ZN10) protection prior to white powder coat finish

Diffuser: injection moulded UV resistant prismatic polycarbonate

Security screws: stainless steel

### Installation/Mounting

Ceiling mounted via (18W) 4 x (7 x 11mm) fixing slots. Cable access via 25mm cable entry hole, off centred. (36W) 6 x (7 x 11mm) fixing slots. Cable access via 25mm cable entry hole, geometrically centred. Diffuser held by 6 (18W) or 10 (36W) x M4 stainless steel security screws.