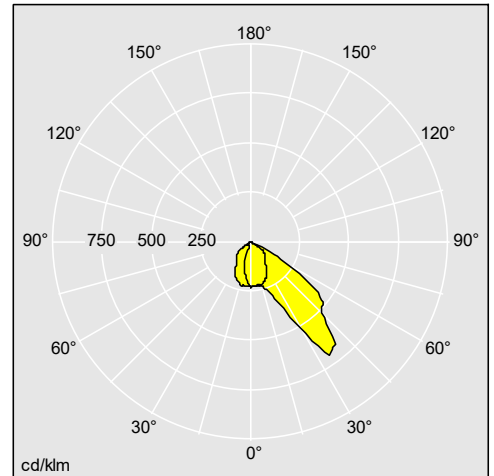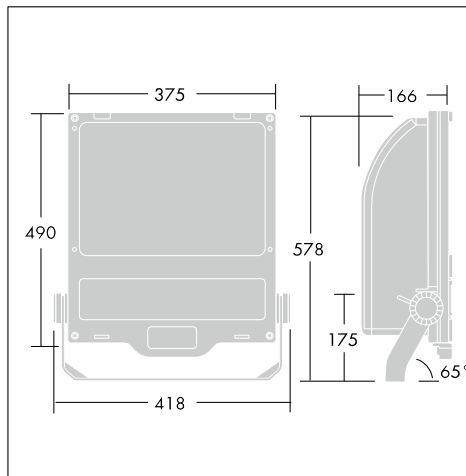# AreaPak

A general purpose floodlight supplied with a 70W/150W/250W/400W High Pressure Sodium or Metal Halide lamp

• Robust die-cast aluminium LM6 body and front frame
• Adjustable stirrup for flexibility in mounting
• Easy installation and maintenance with drop down glass and cable entry
• Special ribs designed to improve heat dissipation

Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

96043377

Material/Finish
Body and front frame: die-cast aluminium LM6, painted black RAL9005.
Reflectors: dimpled anodized aluminium with specular side reflector.
Lens: tempered 4mm flat glass with stainless steel bolts and silicone rubber gasket.
Stirrup: 4mm mild steel, powder coated black, RAL 9005.

Installation/Mounting
Single gland cable entry suitable for Ø9-13mm OD cable with 3 pole terminal block for up to 4mm cables.
Areapak 1 has a stirrup fixed by a single bolt through a 16mm diameter hole. Two additional 11mm diameter fixing holes at 102mm centres. AreaPak 2 has a stirrup fixed through a 21mm diameter hole. Two additional 13mm diameter fixing holes at 250mm centres.

ASNZS60598, IP65, HIT-DE, SC1, HST_HIT_E40_E27, RCM