



## Piazza II LED

**A robust IP65 outdoor wall mounted luminaire with a unique light distribution, ideal for building perimeter applications**

- IDA Dark Sky Approved
- \*IDA fixture seal of approval relates to  $\leq 3000$  K only and clear enclosures. Luminaires must be mounted as photometered.
- Unique photometrics with 3 metre forward light throw and 12 metre spacing - ideal for perimeter walkways
- Very low upward light throw with less than 2.5% ULOR
- Excellent 116 lm/W efficiency
- Easy installation, back mounted, BESA and surface mounted conduit compatible



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

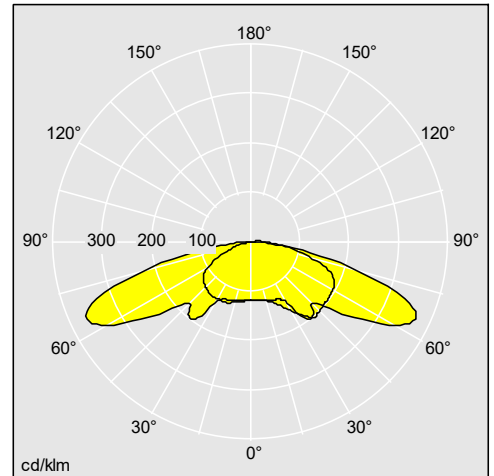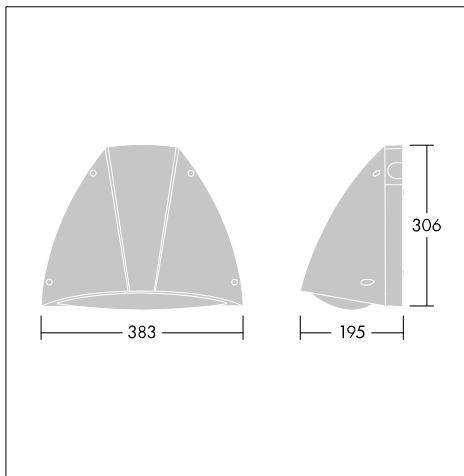

96666256

### Material/Finish

Back-plate: die-cast aluminium painted anthracite (RAL7016)  
 Body: polycarbonate In anthracite colour (RAL 7016)  
 Diffuser: textured clear polycarbonate

### Installation/Mounting

Wall mountable. Ø20 mm cable entry via rear or side conduit entries. Recommended 3-4 metre mounting height.

### Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Piazza II LED</b>				
PIAZZA II LED 2700-840 HF ANT	LED		2,8	96666261
PIAZZA II LED 2700-840 HF P ANT	LED		2,8	96666264
PIAZZA II LED 2700-830 HF ANT	LED		2,8	96632759
PIAZZA II LED 2700-830 HF P ANT	LED		2,8	96632760
<b>Piazza II LED, dimmable</b>				
PIAZZA II LED 2700-840 HFI-X EC ANT	LED		2,8	96666265