


Omega Pro 2 Mini

Complimentary office lighting solution

- Modular square luminaire with pre-fitted springs for easy installation into modular or plasterboard ceilings / walls; surface mounting options are available too via an additional mounting box
- Two optics ensure tailor made lighting results, either for corridors and circulation areas (UGR22, OP) or for extended office areas or assembly spaces (UGR19 @ 900 lm; UGR22 @ 1800 lm, MPT)
- To influence the room ambience, two colour temperatures - warm white (3000K) and neutral (4000K) - are available in high CRI (>90) to ensure the right lit quality
- Furthermore, the family is featuring emergency units and can be connected to building management systems via DALI (HFIX) or BDW (BC)



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

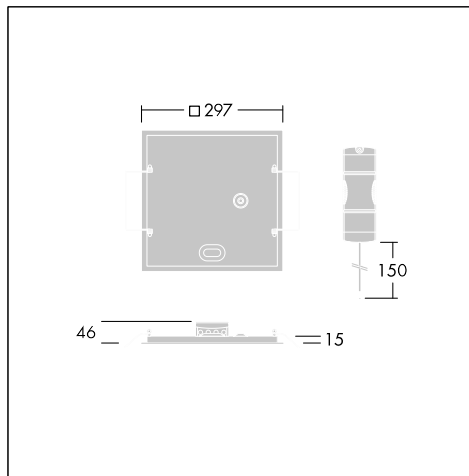

Material/Finish

Frame: mild sheet steel, white (RAL9016)

Back: mild sheet steel, galvanised

Diffuser: OP = UV-stabilized PMMA, MPT = UV-stabilized PC

Installation/Mounting

Lay-in: Omega Pro LED is suitable for lay-in installation into 300mm modular ceilings with 15mm or 24mm exposed T grid.

Plasterboard ceilings: Each product is pre-equipped with loaded springs for easy installation into plasterboard ceilings without the need for any further modification.

Surface mounting: collar type - fixed to the ceiling with 4 screws via keyhole slots, product to be laid in.