



## Mundial C

**A high specification, high performance discharge floodlight ideal for sports field and stadium lighting, both indoor and outdoor.**

- Choice of lamps giving flexibility in lumen package, Ra index and colour temperature
- Easy installation and maintenance with rear access and automatic power interruption
- Hot Restrike versions available for sports and any applications where prolonged lack of lighting is not permitted
- Computer optimised optical systems - integrated baffle for asymmetrical distribution.



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

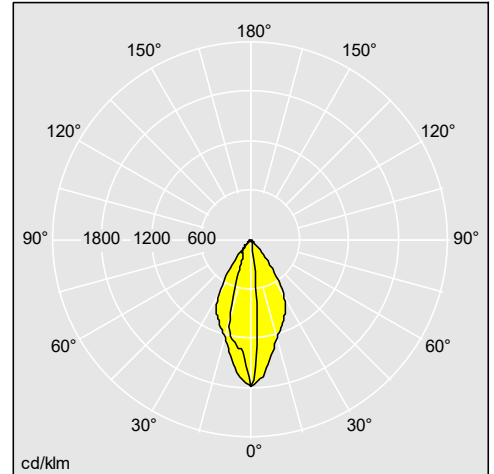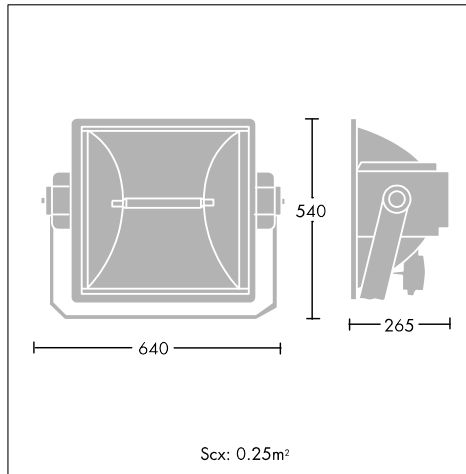

96009880

### Material/Finish

Body and frame: die-cast aluminium, unpainted.

Front glass: thermal resistant 4mm clear glass.

Stirrup: unpainted galvanised steel.

Visor and louvre: black aluminium.

Wiring box for electrical connection: polyamid.

For Hot restrike Irem version - ignitor box including timer unit: polyester.

Cable protection for cables used to connect the HR ignitor on Mundial: rigid black PVC in spiral.

### Installation/Mounting

Stirrup fixed by single M20 bolt through 22mm Ø central hole, or twin bolts through 15mm Ø holes.

Cable clamp supplied for 7.5-13mm Ø flexible cable.

Gearless floodlight (geartray to be ordered separately).

Hood accessory fixed via 4 screws.