




Guardian Downlight

	TC-TEL (FSM)	Gx24q-3	32W
	TC-TEL (FSM)	Gx24q-4	42W
AS/NZS 60598			 Class 1 Electrical

A recessed security downlight designed for top access only

- Permanent ceiling ring fitting
- High impact 4.5mm stippled polycarbonate diffuser
- Easy top access key hole twist and lock mechanism
- Excellent light distribution
- High temperature thermoplastic housing
- Remote control gear

Materials/Finish



Body: High purity bright anodised aluminium reflector.
 Bracket: Stainless steel easy downlight removal system.
 Top Frame: High temperature thermoplastic.
 Ceiling Ring: Heavy gauge pressed steel powder coated white with welded copper bolts.
 Diffuser: 4.5mm stippled polycarbonate.

Installation/Mounting

Diffuser and ceiling ring are mounted permanently with 3 nuts and bolts from the top. Luminaire and lamps are accessible only from the top on a key hole twist and lock flange base.

Specification

To specify state: Top access mounted security luminaire, twin 32W/42W remote control gear. As Thorn Guardian Downlight.

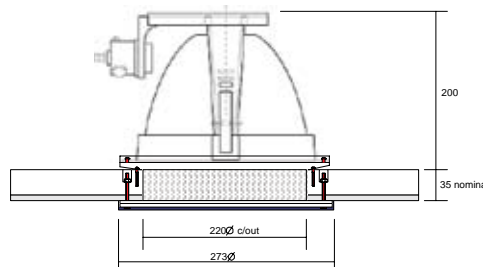

Ordering Guide

Supplied complete with lamp.

Description	Ilcos Code	Socket	Wt (kg)	Cat. No.	SAP Code
Guardian Downlight					
2 x 32W DOWNLIGHT	FSM	GX24q-3	1.29	GUDL/232/TA	96039360
2 x 42W DOWNLIGHT	FSM	GX24q-4	1.29	GUDL/242/TA	96039361