

Line XS Suspended

T16(FD)	G5	28W
AS/NZS60598	Class I Electrical	
IP20		

Elegant minimalist luminaire –
A bright line

- An example of the modern, minimalist trend in lighting design made possible by slim T5 (T16) lamps
- Perforated sides with opal foil create a sensational light accent (blue available to special order)
- Excellent lighting performance
- Suitable for offices, conference rooms and shops
- Easy to install and maintain
- Continuous end to end mounting possible
- Dimming version available

Material/Finish

Body and end caps: powder coated steel in textured grey or white.

Line XS Tech:

Parabolic louvre: anodised aluminium.

Line XS Uplight:

Reflectors: anodised aluminium

Line XS Soft:


Diffuser: opalized acrylic.

Installation/Mounting

3 x 2 x 2.5mm² terminal block.


2.6m white or grey non-halogen cable 3 x 0.75mm².

Quick-lock wire suspension included.

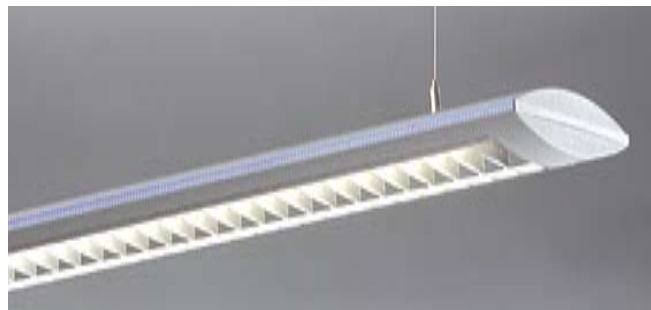

Line XS Tech

- Classic workplace luminaire
- Efficient reflector louvre creates downlight with glare control
- Approx. 50:50 uplight/downlight
- Parabolic louvre made of matt anodised aluminium
- Slim profile brings unobtrusive elegance
- Simple installation





Specification

To specify state:

Slim pendant luminaire with perforated sides for 28W T16 linear fluorescent lamps with parabolic louvre.

As Thorn Line XS Tech.

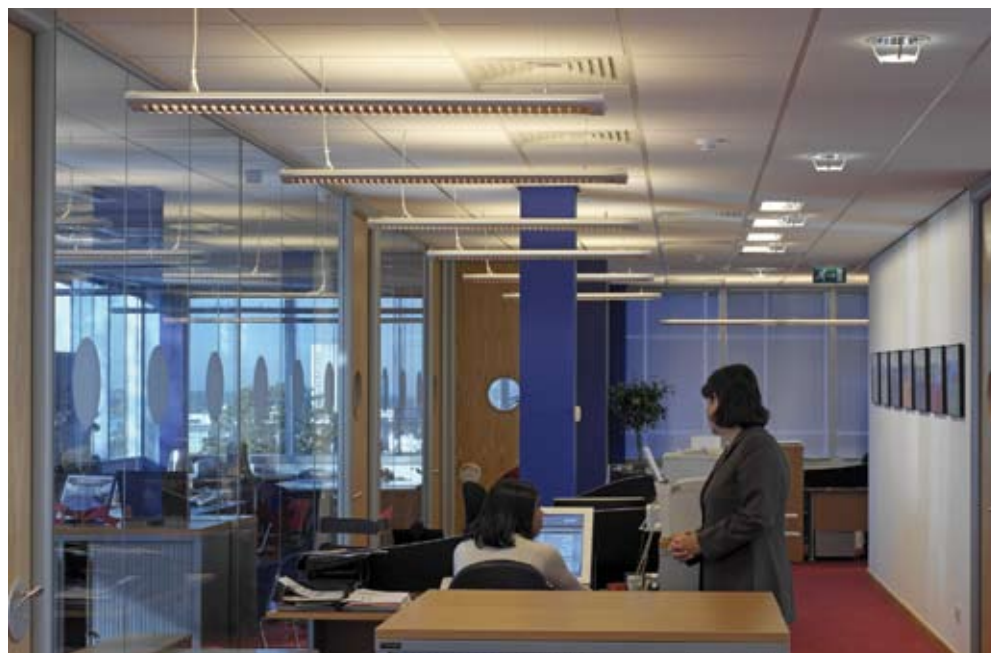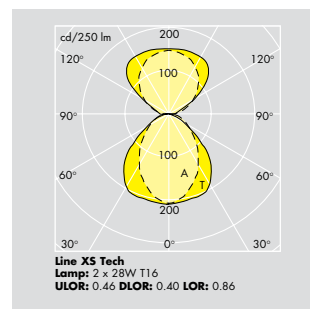

Thorn Lighting, Head Office, Herefordshire, UK



Line XS Soft



Diffused, decorative lighting

- Acrylic diffuser with refractors
- Opalized diffuser cuts off downlight
- Approx. 50:50, uplight/downlight
- Easy installation

Specification

To specify state:

Slim pendant luminaire with perforated sides for 28W T16 linear fluorescent lamps with acrylic and opalised diffuser. As Thorn Line XS Soft.

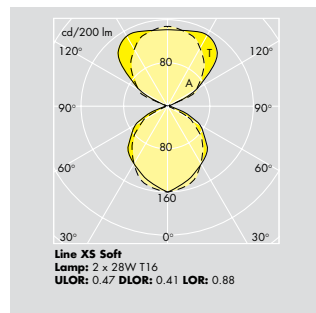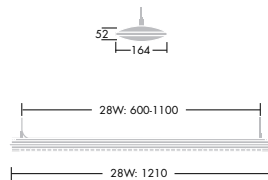



Line XS Uplight

- Pure 100% uplight luminaire
- Smooth clean look
- Small dimensions optimised for the lighting characteristics of T5 (T16) lamps
- Easy to maintain and install
- High quality and efficiency

Specification

To specify state:

Slim pendant luminaire with perforated sides for 28W T16 linear fluorescent lamps. As Thorn Line XS Uplight.

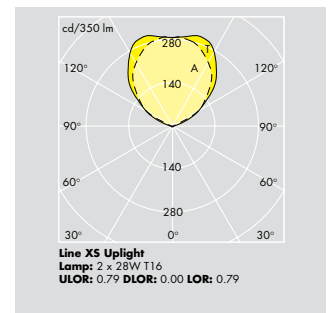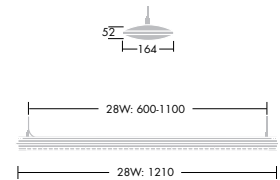

Ordering Guide

Lamps to be ordered separately.

Description	Ilcos Code	Socket	Wt (kg)	Cat. No.	SAP Code
Line XS Tech					
LINE XS TECH 2X28W WHI PF/OP	FDH	G5	3.1	LINEXST228W/O	96013561
LINE XS TECH 2X28W GRY PF/OP	FDH	G5	3.1	LINEXST228GY/O	96013562
Line XS Soft					
LINE XS SOFT 2X28W WHI PF/OP	FDH	G5	2.9	LINEXSP228W/O	96013565
LINE XS SOFT 2X28W GRY PF/OP	FDH	G5	2.9	LINEXSP228GY/O	96013566
Line XS Uplight					
LINE XS UP 2X28W WHI PF/OP	FDH	G5	3.1	LINEXSU228W/O	96013569
LINE XS UP 2X28W GRY PF/OP	FDH	G5	3.1	LINEXSU228GY/O	96013570

WHI = White, GRY = Grey. PF/OP = Perforated side with opal acrylic foil. Special product complete with blue acrylic foil insert available to order