
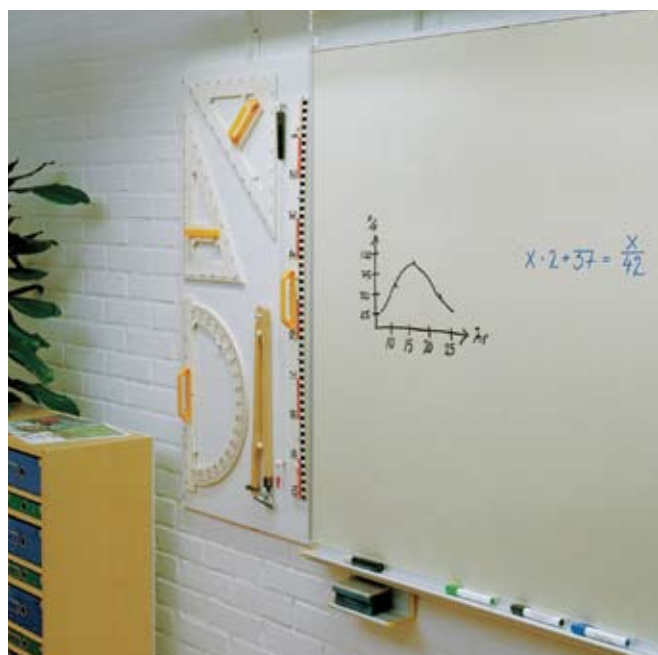


# Nomad

TC-L (FSD)	2G11	55W
AS/NZS60598	Class I Electrical	

A low energy luminaire with asymmetric reflector for effective wall washing in retail areas, display areas and corridors

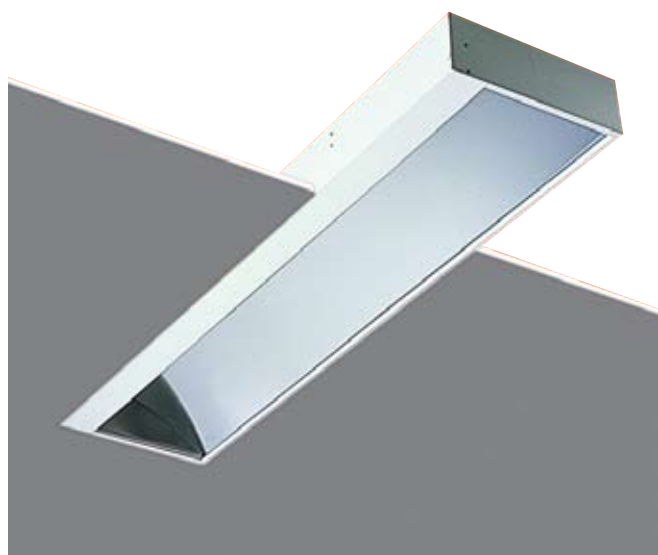

- Choice of two sizes - 600mm or 1200mm - for one or two lamps
- High frequency electronic ballast gives efficient, flicker free lighting
- Precise optical control from asymmetric reflector
- Continuous mounting to suit application
- Subtle but directional light ideal for wall washing or to complement spot and accent lighting
- Provision for through wiring
- Surface version also available on request
- For plaster recessed installation special frame has to be ordered

## Materials/Finish


Body: mild steel with low gloss white stove enamel finish.  
Reflector: one piece profiled, texturebrite semi-specular aluminium with low iridescent finish.

## Installation/Mounting

Recessed: Designed for installation with narrow (15mm) or standard 24mm exposed tee ceilings using fixing/support brackets. For ceilings with 38mm high grids the brackets are fixed to pre-located positions on the body with only the minimum adjustment required for securing. Provision for through wiring facility.


## Specification

To specify state:  
Recessed low energy asymmetric luminaire with high frequency electronic control gear for one/two 55W TC-L lamps.  
As Thorn Nomad.

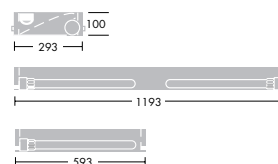

**Ordering Guide** Lamp(s) to be ordered separately.

Description	Ilcos Code	Socket	Wt (kg)	Cat. No.	SAP Code
NOMAD TC-L 1X55W	FSD	2G11	3.0	NOMZR155	96007384
NOMAD TC-L 2X55W	FSD	2G11	5.5	NOMZR255	96004032



**Nomad**  
Lamp: 2 x 55W TC-L  
DLOR: 0.42 LOR: 0.42 LMC: 8

