

# OQ 1000/OSQ

	HIT (MT)	G12	150W
	QT (HSG)	GY9.5	300 - 500W
	HIR (MR)	G38	1000W
AS/NZS 60598		Class I Electrical	
20 Nm Impact resistant			
IP54			

A narrow beam, high intensity projector for feature lighting employing metal halide or tungsten halogen lamps



CSI version

- Particularly suitable for lighting statues, towers, flag poles and signs
- Variation in beam achieved by a choice of front glass
- Metal halide version supplied with warm white 3000K colour temperature lamp
- Integral control gear (except 1000W version)
- Tungsten halogen versions for 300W and 500W lamps (not supplied)



## Materials/Finish



Two-part body: LM6 cast aluminium, finished black.  
 Metal halide wiring box: cast aluminium.  
 Tungsten halogen wiring box: black moulded plastic.  
 Stirrup: galvanised steel.  
 Lens bezel: aluminium.

## Installation/Mounting

Floodlight is fully adjustable on stirrup. Fixes via central Ø22mm hole. Two additional Ø11mm holes at 102mm centres. Rear section is removable for relamping without disturbing aiming angle. Combined gland/cord grip for Ø9-12mm cable in 20mm entry. Floodlight must be mounted at least 2.25m from any combustible material. Tungsten halogen version uses clear front glass retained by aluminium bezel. 150W metal halide version has a cast aluminium box with integral control gear fixed to rear of floodlight. 1000W metal halide version requires external gear box (Ordered separately). Note: Metal halide floodlight should not be operated without a front glass. Versions supplied without glass, glass must be ordered separately.

## Specification

To specify state: Enclosed narrow beam exterior floodlight with cast LM6 aluminium body for single ended 150W HIT or 300W/500W QT or 1000W HIR lamps.  
 As Thorn OQ/OSQ.

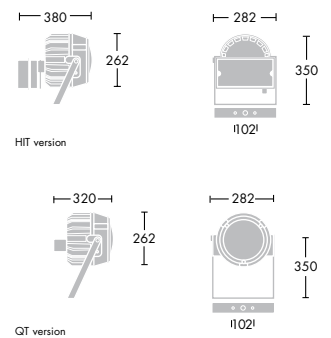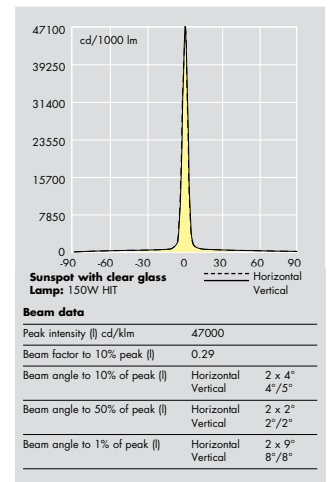

**Ordering Guide** HIT 150W supplied with lamp but front glass must be ordered separately. QT 300/500W supplied with front glass but lamp to be ordered separately.

Description	Ilcos Code	Socket	Wt (kg)	Cat. No.	SAP Code
SUNSPOT HIT 150W WITH GEAR, LAMP, LESS FRONT GLASS	MT	G12	11	OSQ150	96006340
SUNSPOT 300/500W QT WITH CLEAR OMC GLASS, LESS LAMP	HSG	GY9.5	7.2	OSQC500	96011354
CSI 1000W WITH 3-WIRE IGNITOR*L/L	MR	G38	8	OQI 1000	96002077

## Attachments

Attachment	Code	SAP Code
CLEAR GLASS	SYMMETRIC	OMC 96002556
STIPPLED GLASS	SYMMETRIC	OMS 96002557
PRISMATIC GLASS	DI-SYMMETRIC	OMP 96005275
WIDE GLASS	DI-SYMMETRIC	OMW 96002144

## Control Gear (1000W version)

CSI 1000W WP 240V NI FUSED	CGWP1CSI240NIF	96038300
----------------------------	----------------	----------

WP - Weatherproof, NI - No ignitor  
 \* Control Gear to be ordered separately for 1000W version.  
 \*\* Hoods and visors available to special order.