

**THORN**  
LIGHTING



**PUNCH**

Classic simplicity



## PUNCH – PURE VALUE IN A CLASSIC DESIGN

### LIGHT DISTRIBUTION OPTIONS

Punch offers genuine value for new as well as for wide-ranging refurbishment projects – beginning with its light distribution options. Its direct light, which can also be combined with indirect light, creates a comfortable atmosphere with excellent glare control. Punch can also provide asymmetric distribution for wall washing effects, for example, for classroom blackboards.

### INSTALLATION VERSATILITY

Working with Punch is simple thanks to its installation versatility. Whether mounted directly on the ceiling or suspended at various heights, set-up is quick and effortless. Wall surface mounting (Asymmetric only) is equally easy with the help of a bracket accessory. Multiple cable entry options and a preinstalled strain relief further simplify installation. The luminaire can also be ordered as DALI dimmable.

### REFURBISHMENT READY

Punch is available in two lengths, L1200 and L1500, to accommodate various surface sizes and lighting designs. Its classic linear louvre form of highly reflective aluminium features a preinstalled power cord. With an efficacy up to 128lm/W, Punch is an excellent choice for a broad range of retrofit projects and applications.

### APPLICATIONS




OFFICE




EDUCATION


## MOUNTING OPTIONS

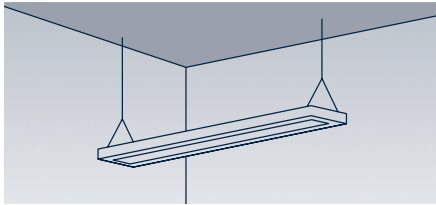

SUSPENDED

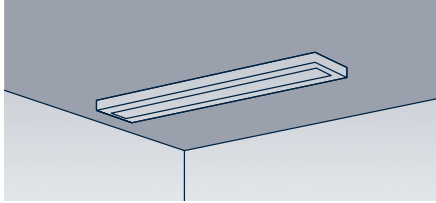


SURFACE MOUNTED

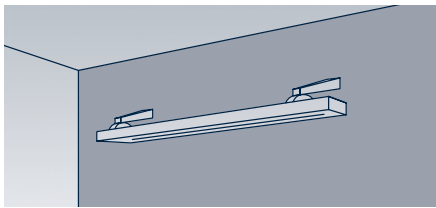


WALL MOUNTED WITH BRACKETS

## INSTALLATION POSSIBILITIES

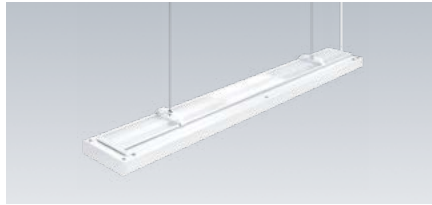

SUSPENDED VERSION

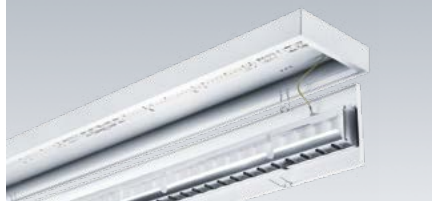


SURFACE MOUNTED VERSION




ASYMMETRIC VERSION


## LIGHTING DISTRIBUTIONS

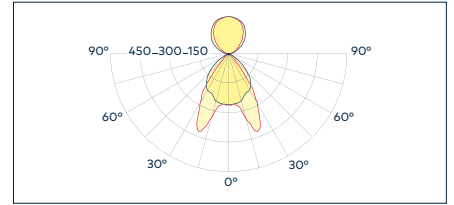

DIRECT / INDIRECT (60/40)

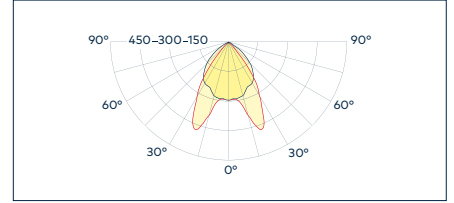


DIRECT

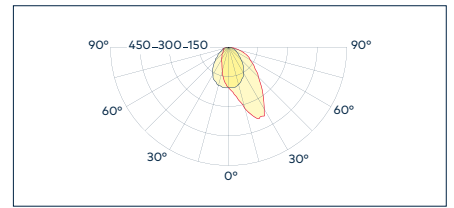


ASYMMETRIC


## DIMENSIONS

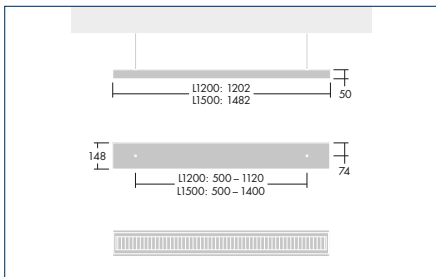

PUNCH SUSPENDED

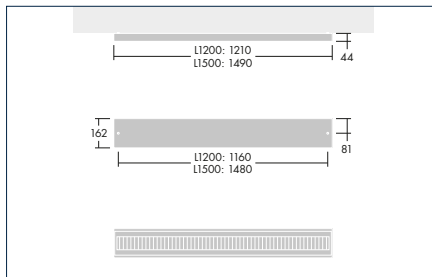

PUNCH SURFACE MOUNTED

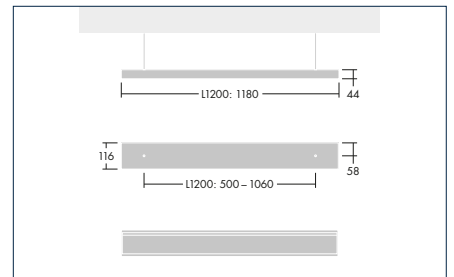

PUNCH ASYMMETRIC

# TECHNICAL DATA



### MATERIALS AND FINISH

- Housing and gear: white powder-coated sheet steel
- End caps: white powder-coated sheet steel
- Louvre: highly reflective aluminium, double parabolic

### INSTALLATION AND MAINTENANCE

- Surface mounted: Piano key terminal, Preinstalled strain relief,
- Suspended: Preinstalled power cord, Infinite suspension options, Brackets for wall mounted (Asymmetric only)

### CONTROLS

- Fixed output (HF)
- DALI dimmable (HFIX)



Up to  
128lm/W



3000K  
4000K



80



2200lm  
4000lm  
5500lm  
6000lm  
6600lm



<16 (D/I),  
<19 (D)



IP20



Direct, Direct/Indirect,  
Asymmetric



Fixed output (HF)  
DALI (HFIX)



50 000 h L80



L1200  
L1500

# GET IN TOUCH

[www.thornlighting.com/PNC3](http://www.thornlighting.com/PNC3) [www.thornlighting.com/contacts](http://www.thornlighting.com/contacts)



**5 YEAR  
GUARANTEE**

As a globally leading luminaire manufacturer, Thorn Lighting provides a five-year warranty for its complete product range within all European Countries.  
[thornlighting.com/guarantee](http://thornlighting.com/guarantee)

Thorn Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.  
10/2020 (INT)

**WE  
MAKE  
LIGHT  
WORK**