


96108741 GRAFFITI 3600-930HE SWI CONT SP BK 12X



Graffiti


LED spotlight for CONTUS continuous-row systems with spot light distribution and stabilized color temperature. control gear. Class II electrical, IP20. Luminaire with CONTUS adapter for simple, rapid mounting of luminaire to CONTUS continuous-row systems. Body: die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 3000K LED, maximum efficiency

This article is bulk packed and contains twelve pieces. The article code has to be ordered as a multiple of twelve (12/24/36/48/60...). All the data on the datasheet refer to a single article.

Dimensions: Ø95 x 204 mm
 Luminaire input power: 27 W
 Luminaire luminous flux: 3400 lm
 Luminaire efficacy: 126 lm/W
 Weight: 0.85 kg



TLG_GRAF_F_CONT_BK_ON.jpg

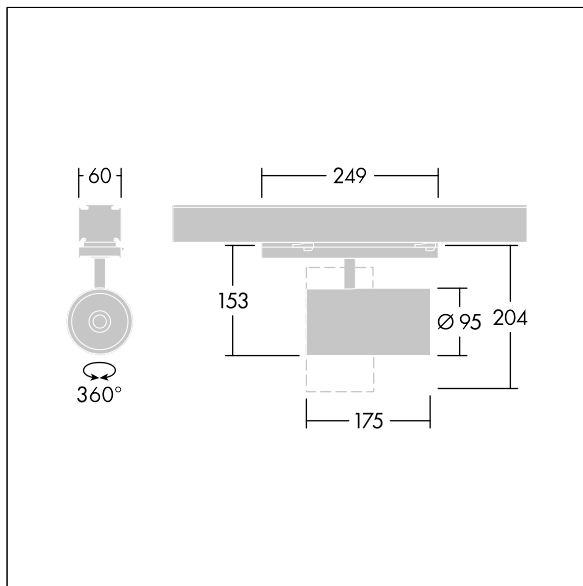

TLG_GRAF_M_CONTUS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Graffiti

96108741 GRAFFITI 3600-930HE SWI CONT SP BK 12X

THORN