


## 96108783 GRAFFITI 3600-940HE SWI CONT SP BK



### Graffiti


LED spotlight for CONTUS continuous-row systems with spot light distribution and stabilized color temperature. control gear. Class II electrical, IP20. Luminaire with CONTUS adapter for simple, rapid mounting of luminaire to CONTUS continuous-row systems. Body: die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is single packed article and can also be ordered bulk packed.

Dimensions: Ø95 x 204 mm  
 Luminaire input power: 27 W  
 Luminaire luminous flux: 3500 lm  
 Luminaire efficacy: 130 lm/W  
 Weight: 0.85 kg



TLG\_GRAF\_F\_CONT\_BK\_ON.jpg

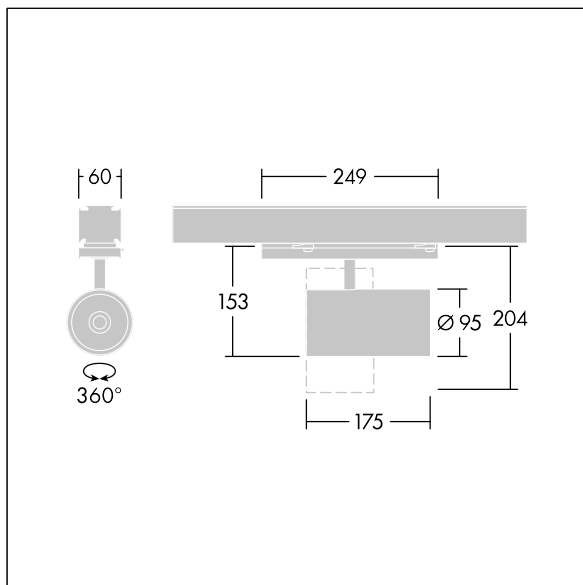

TLG\_GRAF\_M\_CONTUS.wmf

This product contains a light source of energy efficiency class C.

**Graffiti**

**96108783 GRAFFITI 3600-940HE SWI CONT SP BK**

**THORN**