

# Trophy

# THORN

## 96652488 TROPHY 312L757 AS2

ISO 9223 C5	RoHS	IP66	IK08			T <sub>a</sub> -20 +45
----------------	------	------	------	--	--	---------------------------


### Trophy

A high powered LED floodlight with AS2 asymmetrical light distribution from 312LEDs. External DALI-2 control gear 240-415V, to be ordered separately. Class I electrical, IP66, IK08. Heatsink and bracket: die-cast aluminium powder coated silver grey (RAL 9007), suitable for coastal installation. Cover: PC lens. Bracket mounted using fixation points available (one M20 screw or two M14 screws), suitable for over and under-slinging. A single 5 core cable is required for the connection between floodlight and control gear. Ideal for sports fields and area lighting. Complete with 5700K LED with Colour Rendering Index min.: 70.

Dimensions: 679 x 724 x 326 mm  
Weight: 17.6 kg  
Total luminous flux: 151287 lm  
Luminaire input power: 1050 W  
Lamp efficacy: 144 lm/W  
Scx: 0.091 at 0° tilt



TLG\_TROPHY\_F\_312L.jpg

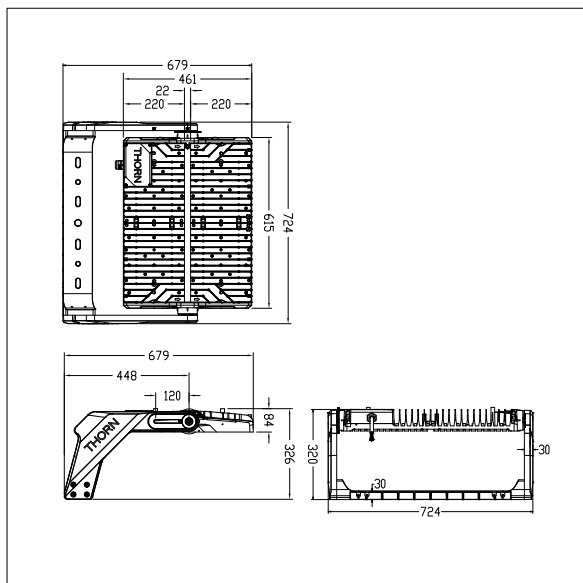

TLG\_TROPHY\_M\_312L.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting