

## 96652492 TROPHY GB IP66 468L105 240-415V CL1 DA

ISO 9223 C3	RoHS	IP66	IK08		T <sub>a</sub> -40 +50
----------------	------	------	------	---	---------------------------

### Trophy

Class I, 1500W constant current gear box, with 3 output channels and DALI 2 control interface. Low flicker operation (<1%) and IP66 enclosure. Suitable for dedicated 468LEDs Trophy floodlight, to be installed remotely up to 200m from the floodlight. Suitable with outdoor conditions up to C3 environment (according to ISO 9223 : 2012), driver to be protected in technical area or cabinet for harsher environment such as coastal, swimming pool or industrial process applications.


Nominal input voltage: 200-440V, 1050mA output current. Surge level 10kV for both common mode and differential mode. Electrical connection via terminal blocks. Mains supply must be protected according to local safety regulations.

Dimensions: 500 x 152 x 77 mm

Weight: 5.6 kg



TLG\_TROPHY\_F\_GB\_IP66.jpg

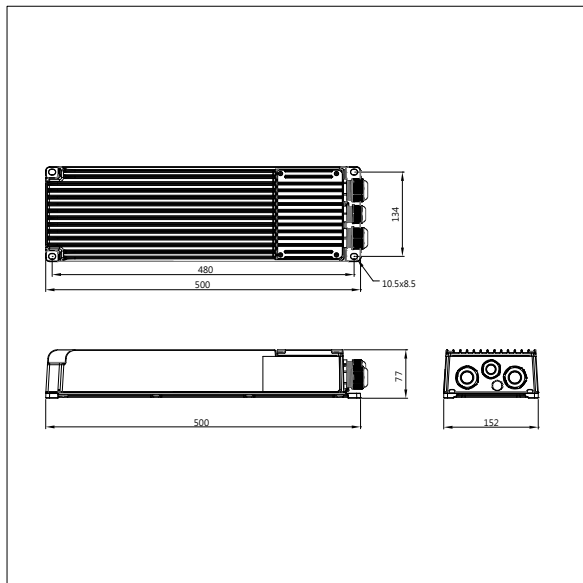

TLG\_TROPHY\_M\_GB\_IP66.wmf