

Linn

THORN

96262137 LINN RCT LED 6L50 732 CL GL

| | | | | | |
|------|------|---|---|--------|-------------------|
| IP65 | IK10 |  |  | 850 °C | T _a 35 |
|------|------|---|---|--------|-------------------|

Linn

A rectangular, Recessed LED luminaire for pathway lighting applications. Electronic, fixed output control gear. Class I electrical, IP65, IK10. Body: die-cast aluminium, painted dark grey (Akzo Nobel 900). Glass: tempered glass, 8mm thick. Recessed housing (required, to be ordered separately): polypropylene. Complete with 3200K LED

Supplied complete with clear glass frame.


Dimensions: 102 x 229 x 91 mm

Luminaire input power: 11.3 W

Weight: 1.05 kg



TLG_LINN_F_RCTPROFLEDPDB.jpg

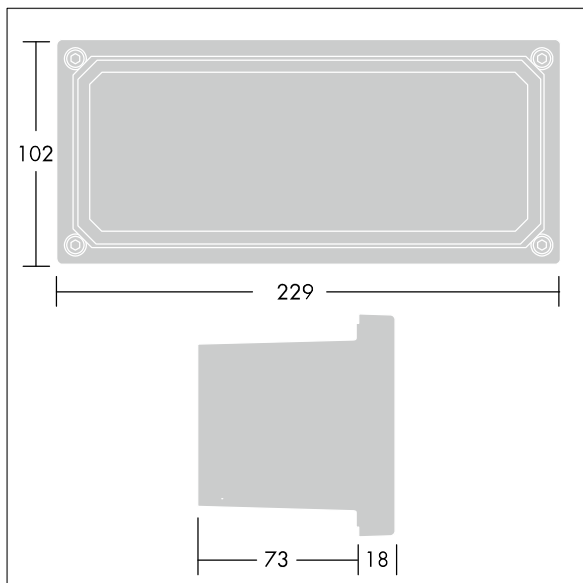

TLG_LINN_M_LDRCTGL.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Linn

96262137 LINN RCT LED 6L50 732 CL GL

THORN