

Areaflood Pro

96644864 AFP S 36L70-740 EWR HFX CL1 SP GY

ISO 9223 C5	IP66	IK08	⊕	⚡	⊗	⚙️	T _a -25 +35
----------------	------	------	---	---	---	----	---------------------------


Areaflood Pro

A compact, lightweight, general purpose LED area floodlight. With small body, driving 36 LEDs at 700mA with Extra Wide Road light distribution. IP66, IK08, Class I electrical. Body: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006).. Enclosure: 4mm thick toughened glass. Reversible mounting stirrup supplied, Equipped with 10kV / 10kA surge protection device. Complete with 4000K LED.

Dimensions: 462 x 265 x 139 mm
 Luminaire input power: 77 W
 Luminaire luminous flux: 11488 lm
 Luminaire efficacy: 149 lm/W
 Weight: 6.34 kg
 Scx: 0.05 m²



TLG_AFLP_F_SMALLPDB.jpg

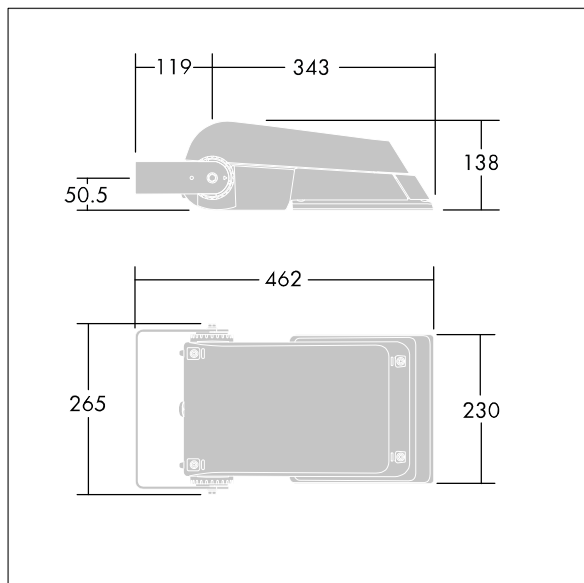

TLG_AFLP_M_SML.wmf

This product contains light sources of energy efficiency class E.

Areaflood Pro

96644864 AFP S 36L70-740 EWR HFX CL1 SP GY

THORN