

# IQ Wave

# THORN

## 96628313 IQ WAVE LED3100-840 HFIX Q597 MRE

	IK03					650°C	T <sub>a</sub> -20 +25
---	------	---	---	---	---	-------	---------------------------


### IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear. Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Dimensions: 597 x 597 x 97 mm  
Luminaire input power: 30 W  
Luminaire luminous flux: 3200 lm  
Luminaire efficacy: 107 lm/W  
Weight: 3.8 kg



TLG\_IQWV\_F\_PDBCEILING.jpg

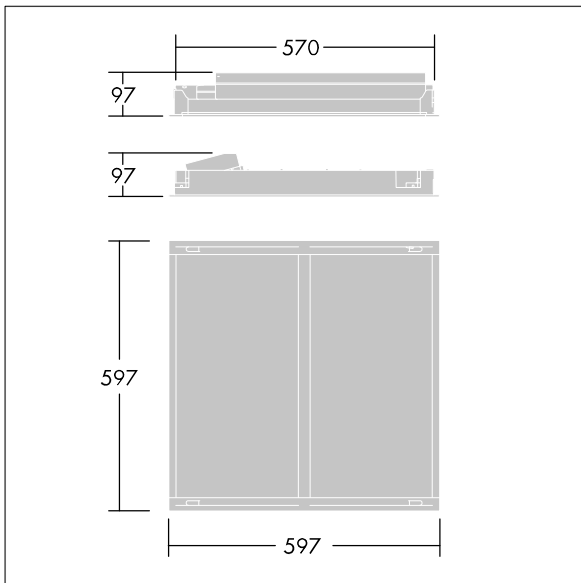

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**IQ Wave**

**96628313 IQ WAVE LED3100-840 HFIX Q597 MRE**

**THORN**