

# IQ Wave SP

THORN

96628951 IQ SUSP S LED2600-840 HFIX ML5

|      |      |  |  |  |  |  |                  |
|------|------|--|--|--|--|--|------------------|
| IP20 | IK05 |  |  |  |  |  | $T_a$ -20<br>+25 |
|------|------|--|--|--|--|--|------------------|


## IQ Wave SP

A lightweight, Suspended, LED luminaire with MV Tech optic. Electronic, DALI dimmable control gear. Class I electrical, IP20, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Fitted with 5 core cable of 2.5m length. Suspension wires included. Ceiling rose to be ordered separately. Complete with 4000K LED

Dimensions: 1140 x 210 x 70 mm  
Luminaire input power: 22 W  
Luminaire luminous flux: 2600 lm  
Luminaire efficacy: 118 lm/W  
Weight: 4.4 kg



TLG\_IQSU\_F\_SUS\_PDB.jpg

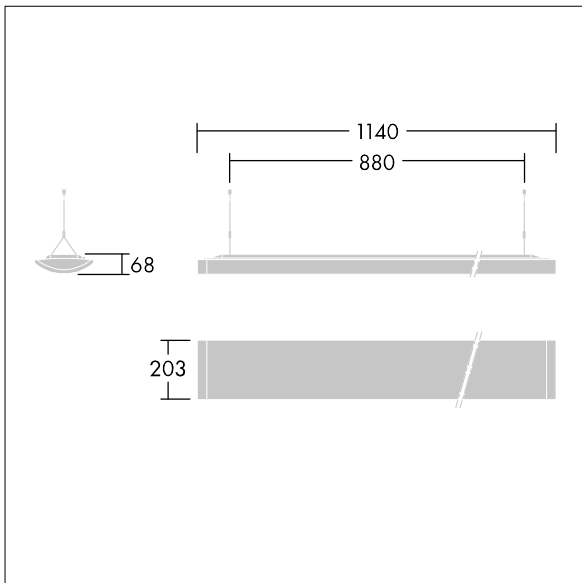

TLG\_IQSU\_M\_SUS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# **IQ Wave SP**

**96628951 IQ SUSP S LED2600-840 HFIX ML5**

**THORN**