

R2L2

THORN

96275556 R2L2 S 24L70-740 NR BS 3550 CL2 GY

ISO 9223 C5	IP66	IK08					T _a -25 +50
----------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	---------------------------


R2L2

A small size LED road lighting lantern with 24 LEDs driven at 700mA with Narrow Road optic. LED driver Programmable. Class II electrical, IP66, IK08. Housing: die-cast aluminium (EN AC-44300), powder coated textured Light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 4000K LED.

Dimensions: 655 x 362 x 155 mm
 Luminaire input power: 51.6 W
 Luminaire luminous flux: 8139 lm
 Luminaire efficacy: 158 lm/W
 Weight: 6.49 kg
 Scx: 0.05 m²



TLG_R2L2_F_SPDB.jpg

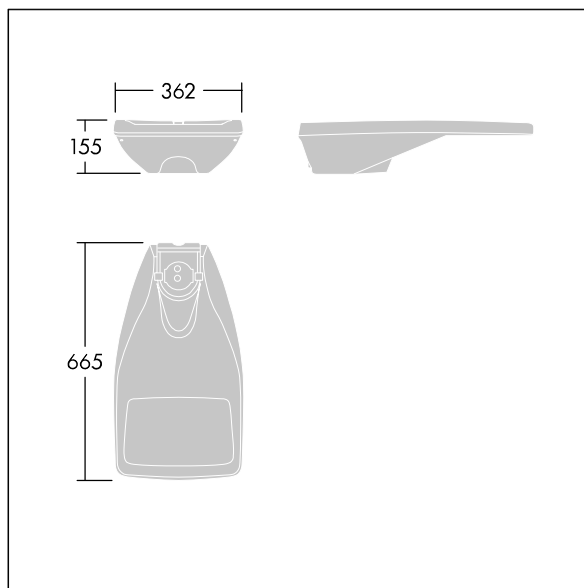

TLG_R2L2_M_LDS.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

R2L2

96275556 R2L2 S 24L70-740 NR BS 3550 CL2 GY

THORN