

# Equaline Mini

96630777 EQUAMINI L1180 LED4200-840 HFX

THORN

|      |      |   |   |   |   |                   |  |
|------|------|---|---|---|---|-------------------|--|
| IP20 | IK06 |  |  |  |  | T <sub>a</sub> 35 |  |
|------|------|---|---|---|---|-------------------|--|


## Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, DALI dimmable control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via flap in rear of body. Continuous linking possible. Complete with 4000K LED

Dimensions: 1180 x 37 x 60 mm  
Luminaire input power: 37.2 W  
Luminaire luminous flux: 4390 lm  
Luminaire efficacy: 118 lm/W  
Weight: 1.15 kg



TLG\_EQUM\_F\_LT.jpg

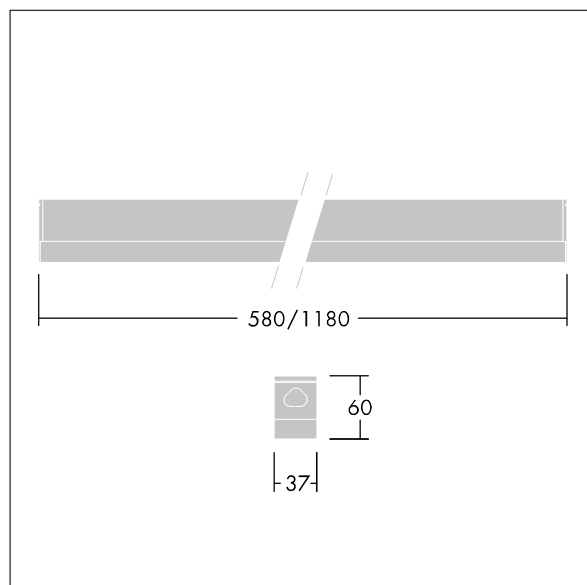

TLG\_EQUM\_M\_LD1.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Equaline Mini

96630777 EQUAMINI L1180 LED4200-840 HFX

THORN