

Luna

96647421 LUNA 10-12W 1120-840

THORN

AS/NZS 60598	IP54		
-----------------	------	---	---


Luna

An ultra slim, round wall or ceiling LED luminaire.
Electronic, fixed output control gear. Body: white moulded polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP54. Supplied with quick mounting bracket. Complete with 4000K LED.

Dimensions: Ø250 x 48 mm
Luminaire input power: 12 W
Luminaire luminous flux: 1142 lm
Luminaire efficacy: 95 lm/W
Weight: 0.85 kg



TLZ_LUNA_F_01.jpg

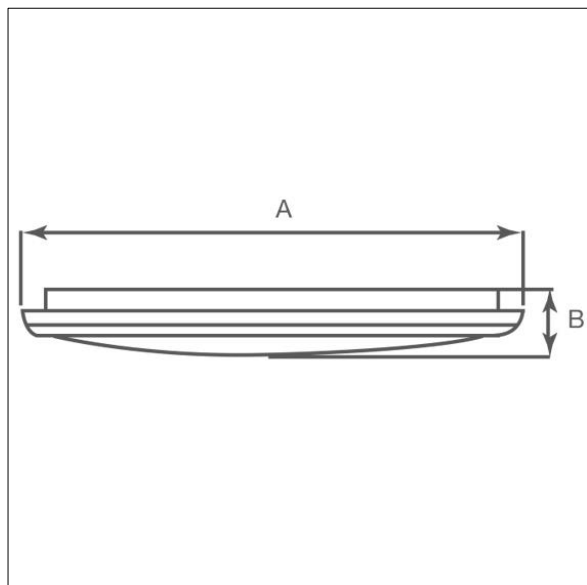

TLZ_LUNA_M_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Luna

96647421 LUNA 10-12W 1120-840

THORN