

Katona

THORN

96631308 KAT SQ 2000-830 HF

| | | | | | | | | | |
|---|------|---|------|---|---|---|---|-------|------------------|
|  | IP65 |  | IK10 |  |  |  |  | 850°C | T_a -15 +35 |
|---|------|---|------|---|---|---|---|-------|------------------|


Katona

A very slim, square functional LED luminaire. Fixed output LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 3000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.

Dimensions: 277 x 277 x 58 mm
Luminaire input power: 16.3 W
Luminaire luminous flux: 1850 lm
Luminaire efficacy: 113 lm/W
Weight: 0.99 kg



TLG_KATO_F_SQ_PDB.jpg

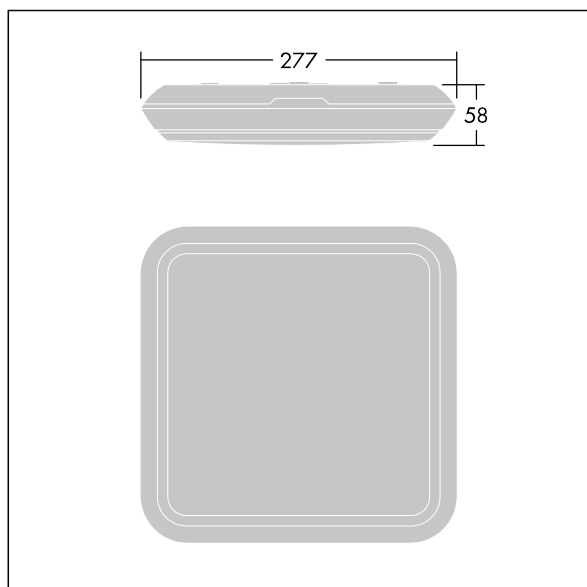

TLG_KATO_M_SQ_LDS.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Katona

96631308 KAT SQ 2000-830 HF

THORN