

96631321 KAT SQ 1000-830 HFI

	IP65		IK10					850°C	T_a -15 +50
---	------	---	------	---	---	---	---	-------	------------------

Katona

A very slim, square functional LED luminaire. DALI dimmable LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 3000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.

Dimensions: 277 x 277 x 58 mm

Luminaire input power: 8.3 W


Luminaire luminous flux: 950 lm

Luminaire efficacy: 114 lm/W

Weight: 1.06 kg



TLG_KATO_F_SQ_PDB.jpg

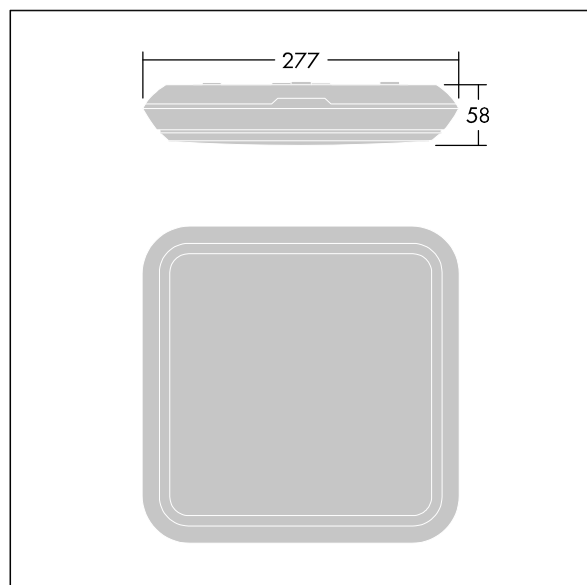

TLG_KATO_M_SQ_LDS.wmf

This product contains a light source of energy efficiency class D.

Katona

96631321 KAT SQ 1000-830 HFI

THORN