

## 96631387 KAT RD 1400-840 BC

|   |      |   |      |   |   |   |   |       |                           |  |
|---|------|---|------|---|---|---|---|-------|---------------------------|--|
|  | IP65 |  | IK10 |  |  |  |  | 850°C | T <sub>a</sub> -15<br>+35 |  |
|---|------|---|------|---|---|---|---|-------|---------------------------|--|

### Katona


A very slim, round bulkhead LED luminaire. LED driver  
Wireless controlled via Casambi protocol. Luminaire  
arrangement: Mobile control to luminaire max. 6m,  
luminaire to luminaire max. 4m. Body: polycarbonate.  
Diffuser: opal polycarbonate. Class II electrical, IP65, IK10.  
Complete with 4000K LED. Suitable for direct mounting to  
wall or ceiling. Loop-in, loop-out is possible for cables up to  
2.5mm<sup>2</sup>.

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm

Dimensions: Ø307 x 58 mm  
Luminaire input power: 11.7 W  
Luminaire luminous flux: 1400 lm  
Luminaire efficacy: 120 lm/W  
Weight: 1.09 kg



TLG\_KATO\_F\_RD\_PDB.jpg

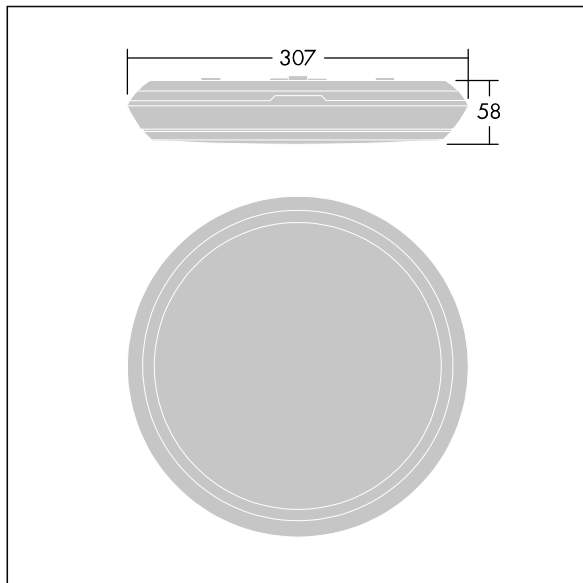

TLG\_KATO\_M\_RD\_LDS.wmf

This product contains a light source of energy efficiency class C.