

96631387 KAT RD 1400-840 BC

	IP65		IK10					850°C	T_a -15 +35	
---	------	---	------	---	---	---	---	-------	------------------	--

Katona


A very slim, round bulkhead LED luminaire. LED driver
Wireless controlled via Casambi protocol. Luminaire
arrangement: Mobile control to luminaire max. 6m,
luminaire to luminaire max. 4m. Body: polycarbonate.
Diffuser: opal polycarbonate. Class II electrical, IP65, IK10.
Complete with 4000K LED. Suitable for direct mounting to
wall or ceiling. Loop-in, loop-out is possible for cables up to
2.5mm².

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm

Dimensions: Ø307 x 58 mm
Luminaire input power: 11.7 W
Luminaire luminous flux: 1400 lm
Luminaire efficacy: 120 lm/W
Weight: 1.09 kg



TLG_KATO_F_RD_PDB.jpg

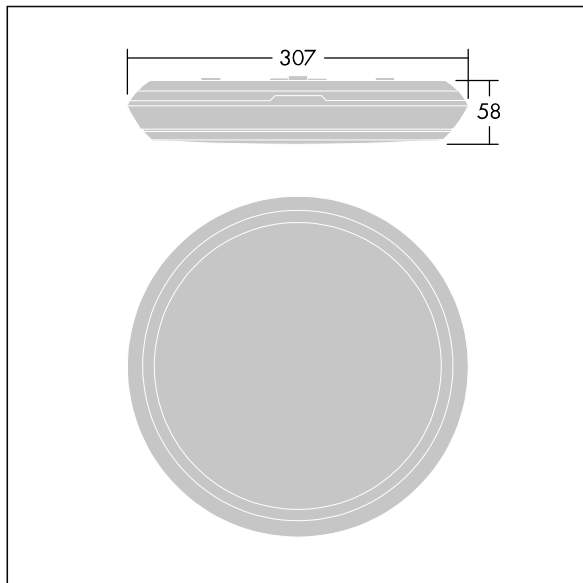

TLG_KATO_M_RD_LDS.wmf

This product contains a light source of energy efficiency class C.

Katona

96631387 KAT RD 1400-840 BC

THORN