

96668622 PLI F 24L50-722-40 R/S T60 CL1 ANT

| | | | | | | | | |
|----------------|------|------|--|--|--|--|-------------------|--|
| ISO 9223 C5 | IP66 | IK08 | | | | | T _a 25 | |
|----------------|------|------|--|--|--|--|-------------------|--|

Plurio


Plurio Indirect: A decorative post-top LED lantern with radially symmetric distribution. LED driver with 24 LEDs driven at 500mA. Class I electrical, IP66, IK08. Base: cast aluminium, powder coated anthracite (close to RAL7043). Canopy: flat shape, aluminium, textured anthracite (close to RAL7043). Diffuser: UV stabilised, clear polycarbonate with anti-glare prisms. Indirect, reflector based optic. Complete with 2200-4000K NightTune LEDs. Post top mounting to Ø60mm column.

Upward lighting emissions below 1%.

Dimensions: Ø601 x 487 mm
 Luminaire input power: 36 W
 Luminaire luminous flux: 3932 lm
 Luminaire efficacy: 109 lm/W
 Weight: 11 kg
 Scx: 0.167 m²



TLG_PLRL_F_IFC_ANT.jpg

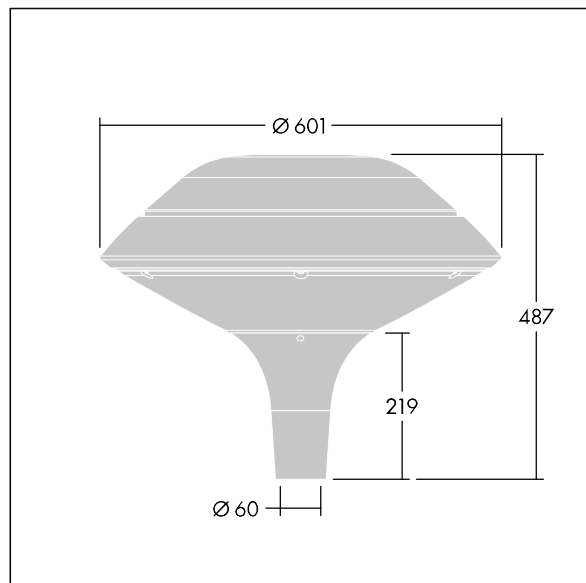

TLG_PLRL_M_IFC_T60.wmf

This product contains a light source of energy efficiency class D.

Plurio

96668622 PLI F 24L50-722-40 R/S T60 CL1 ANT

THORN