

## 96632768 ARW 18L105-740 RS CL-D CL2 W5 T60 ANT

ISO 9223 C5		IP66	IK10				
----------------	--	------	------	--	--	--	--


### Aerie

A discreet, post top LED lantern with a timeless design. LED driver for 18 LEDs, driven at with radially symmetric distribution. Class II electrical, IP66, IK10. Canopy and base: corrosion resistant die-cast powder coated aluminium suitable for C5 environments, finished textured anthracite (close to RAL7043). Enclosure: wide UV stabilised polycarbonate with clear finish. Fitted with internal diffuser to reduce glare. Complete with 4000K LED. Post top mounting to Ø60mm column. Pre-wired with 5m cable.

Dimensions: Ø602 x 586 mm  
 Luminaire input power: 60 W  
 Luminaire luminous flux: 7239 lm  
 Luminaire efficacy: 121 lm/W  
 Weight: 11.06 kg  
 Scx: 0.172 m<sup>2</sup>



TLG\_AERI\_F\_W\_PR\_CL.jpg

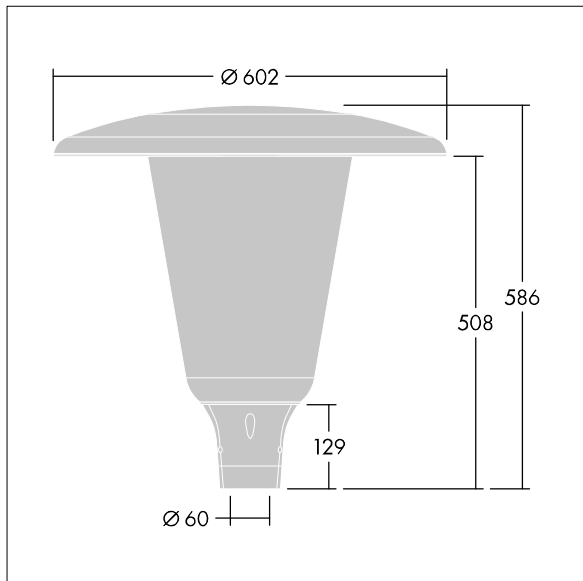

TLG\_AERI\_M\_T60\_W.wmf

This product contains a light source of energy efficiency class D.