

96632922 ARS 24L50-740 WSC CL CL1 W5 T76 ANT

ISO 9223 C5		IP66	IK10				
----------------	--	------	------	--	--	--	--


Aerie

A discreet, post top LED lantern with a timeless design. LED driver for 24 LEDs, driven at 500mA with Wide Street Comfort (asymmetrical) distribution. Class I electrical, IP66, IK10. Canopy and base: corrosion resistant die-cast powder coated aluminium suitable for C5 environments, finished textured anthracite (close to RAL7043). Enclosure: slim UV stabilised polycarbonate with clear finish. Complete with 4000K LED. Post top mounting to Ø76mm column. Pre-wired with 5m cable.

Dimensions: Ø602 x 586 mm
 Luminaire input power: 37 W
 Luminaire luminous flux: 5605 lm
 Luminaire efficacy: 151 lm/W
 Weight: 11.21 kg
 Scx: 0.172 m²



TLG_AERI_F_S_CL.jpg

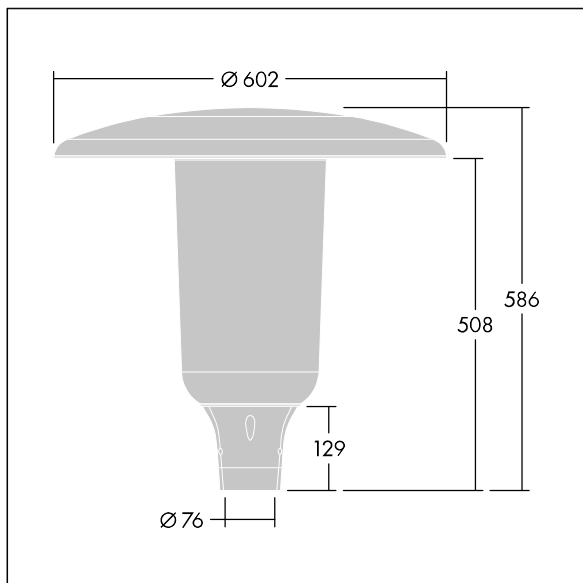

TLG_AERI_M_T76_S.wmf

This product contains a light source of energy efficiency class D.

Aerie

96632922 ARS 24L50-740 WSC CL CL1 W5 T76 ANT

THORN