

## 96632914 ARW 18L50-740 RS CL-D CL1 W5 T76 ANT




### Aerie

A discreet, post top LED lantern with a timeless design. LED driver for 18 LEDs, driven at 500mA with radially symmetric distribution. Class I electrical, IP66, IK10. Canopy and base: corrosion resistant die-cast powder coated aluminium suitable for C5 environments, finished textured anthracite (close to RAL7043). Enclosure: wide UV stabilised polycarbonate with clear finish. Fitted with internal diffuser to reduce glare. Complete with 4000K LED. Post top mounting to Ø76mm column. Pre-wired with 5m cable.

Dimensions: Ø602 x 586 mm  
 Luminaire input power: 28 W  
 Luminaire luminous flux: 3846 lm  
 Luminaire efficacy: 137 lm/W  
 Weight: 11.23 kg  
 Scx: 0.172 m²



TLG\_AERI\_F\_W\_PR\_CL.jpg

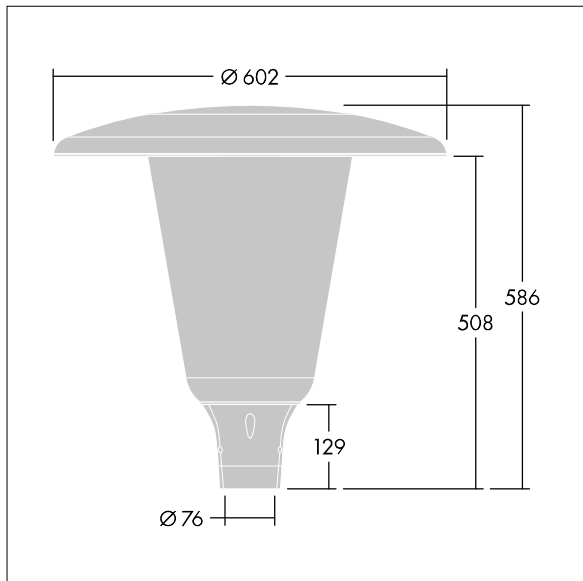

TLG\_AERI\_M\_T76\_W.wmf

This product contains a light source of energy efficiency class D.

**Aerie**

**96632914 ARW 18L50-740 RS CL-D CL1 W5 T76 ANT**

**THORN**