

96632916 ARW 18L105-740 RS CL-D CL1 W5 T76 ANT

| | | | | | | | | | |
|----------------|------|------|--|--|--|--|--|--|--|
| ISO 9223 C5 | IP66 | IK10 | | | | | | | |
|----------------|------|------|--|--|--|--|--|--|--|


Aerie

A discreet, post top LED lantern with a timeless design. LED driver for 18 LEDs, driven at with radially symmetric distribution. Class I electrical, IP66, IK10. Canopy and base: corrosion resistant die-cast powder coated aluminium suitable for C5 environments, finished textured anthracite (close to RAL7043). Enclosure: wide UV stabilised polycarbonate with clear finish. Fitted with internal diffuser to reduce glare. Complete with 4000K LED. Post top mounting to Ø76mm column. Pre-wired with 5m cable.

Dimensions: Ø602 x 586 mm
 Luminaire input power: 60 W
 Luminaire luminous flux: 7239 lm
 Luminaire efficacy: 121 lm/W
 Weight: 11.23 kg
 Scx: 0.172 m²



TLG_AERI_F_W_PR_CL.jpg

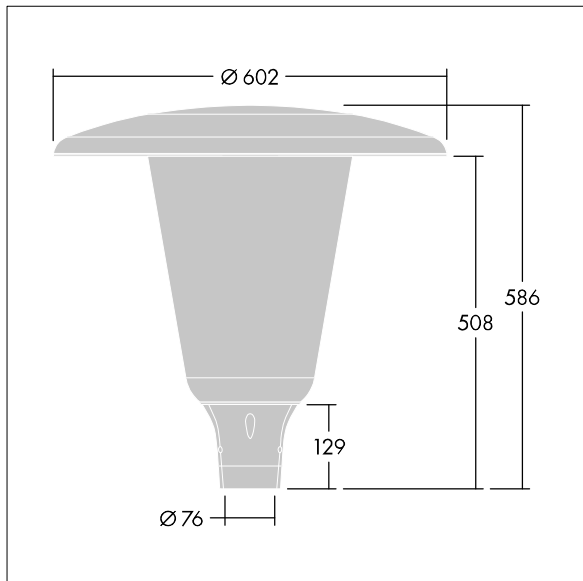

TLG_AERI_M_T76_W.wmf

This product contains a light source of energy efficiency class D.

Aerie

96632916 ARW 18L105-740 RS CL-D CL1 W5 T76 ANT

THORN