

## 96649335 CHARTOR HEAD LF LED800-840 LUC AL

AS/NZS 60598	IP44	IK09			
-----------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--

### Chartor


A timeless bollard offering modest visual guidance and comfortable light with low glare. Head: die-cast aluminium, unpainted (Other colours available upon request). Diffuser: semi-opal anti-UV polycarbonate. Lenses: clear polycarbonate. Class I electrical, IP44, Impact strength: IK09. Low upward component limiting upward stray light for improved visual comfort.

Electronic, fixed output control gear for LED. Complete with 4000K LED

Dimensions: Ø140 x 230 mm  
Luminaire input power: 27.5 W  
Weight: 2.3 kg



TLA\_CHAR\_F\_HEAD\_AL.jpg

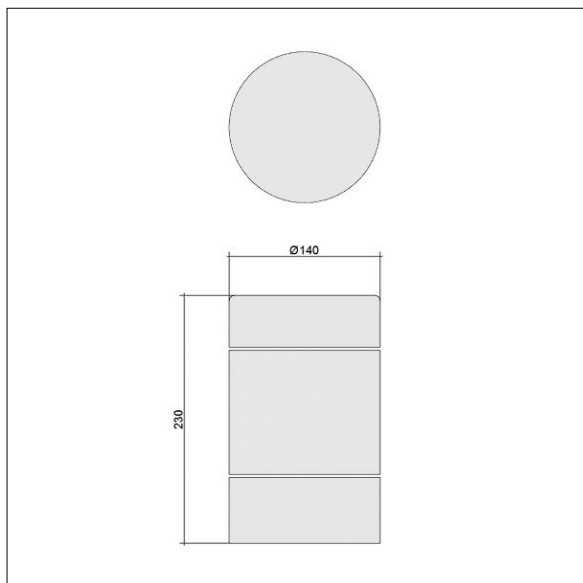

TLA\_CHAR\_M\_HEAD.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Chartor**

**96649335 CHARTOR HEAD LF LED800-840 LUC AL**

**THORN**