

**96633529 CONT3 36L105 722-840 NB HFX SP ANT**

ISO 9223	C5	IP 66	IK 08					T <sub>a</sub> - 20 + 35
----------	----	-------	-------	---	---	---	---	-----------------------------


## Contrast

A large architectural Bracket mounted LED Floodlight with 36 LEDs driven at 12V and a narrow beam distribution. LED driver, DALI-2 dimmable. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with 2200-4000K balanced white LEDs

Dimensions: Ø397 x 206 mm  
Luminaire input power: 118 W  
Luminaire luminous flux: 11427 lm  
Luminaire efficacy: 97 lm/W  
Weight: 13.2 kg



TLG CON3 F M 36L.jpg

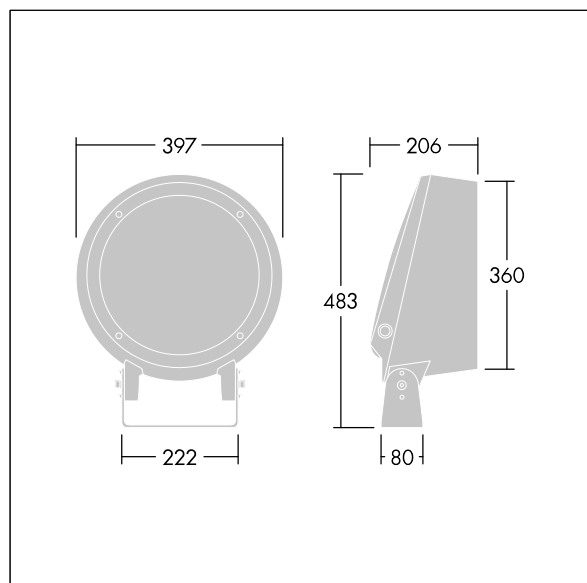

TLG CONL M 36-52L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting