

Contrast

THORN

96633531 CONT3 36L70 722-840 NB BC 6K ANT

| | | | | | | | |
|----------|------|------|---|---|---|---|---------------------------|
| ISO 9223 | IP66 | IK08 |  |  |  |  | T _a -20 +35 |
| C5 | | | | | | | |

Contrast

A large architectural Bracket mounted LED Floodlight with 36 LEDs driven at and a narrow beam distribution. ,. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with 2200-4000K balanced white LEDs


,

Dimensions: Ø397 x 206 mm
Luminaire input power: 6 W

Weight: 13.2 kg



TLG_CON3_F_M_36L.jpg

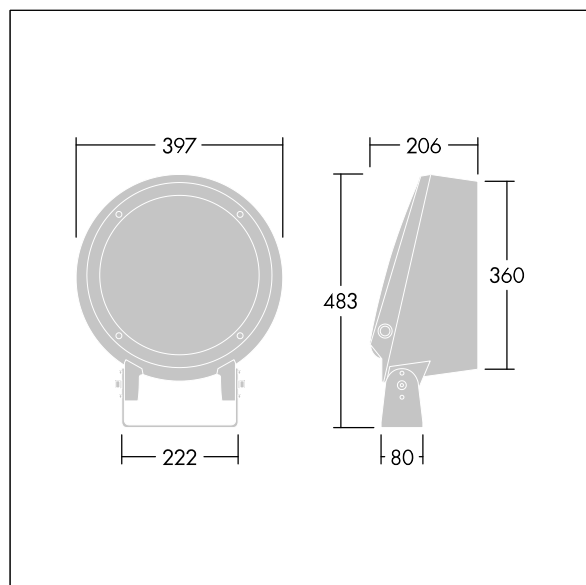

TLG_CONL_M_36-52L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting