

# Contrast

THORN

96633459 CONT3 52L105-722-840 NB HFX 6K ANT

|                |      |      |   |   |   |   |                           |
|----------------|------|------|---|---|---|---|---------------------------|
| ISO 9223<br>C5 | IP66 | IK08 |  |  |  |  | T <sub>a</sub> -20<br>+25 |
|----------------|------|------|---|---|---|---|---------------------------|


## Contrast

A large architectural Bracket mounted LED Floodlight with 52 LEDs driven at and a narrow beam distribution. LED driver, DALI-2 dimmable. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 6kV surge protection device. Complete with 2200-4000K balanced white LEDs

Dimensions: Ø397 x 206 mm  
Luminaire input power: 166 W  
Luminaire luminous flux: 16410 lm  
Luminaire efficacy: 99 lm/W  
Weight: 13.1 kg



TLG\_CON3\_F\_M\_52L.jpg

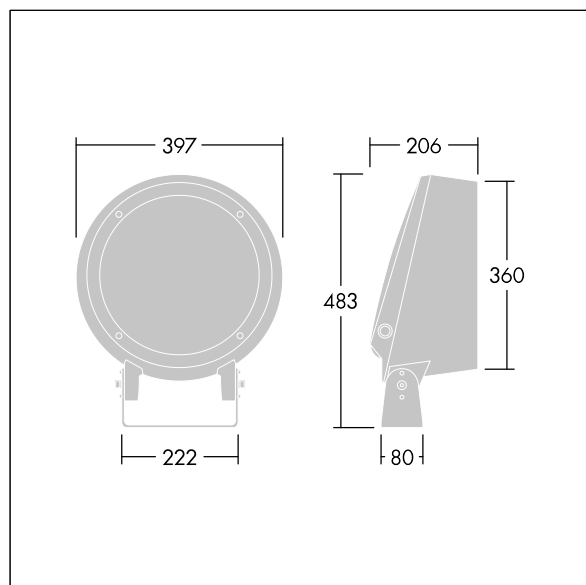

TLG\_CONL\_M\_36-52L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting