

## 96633438 CONT3 4L50-822-40 NB NG IO ANT

ISO 9223	IP66	IK08				T <sub>a</sub> -20 +35
C5						


### Contrast

A small architectural Bracket mounted LED Floodlight with LEDs driven at 500mA and a narrow beam distribution. .  
Pre-wired with IP66 connector, gear box to be ordered separately. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with 2200-4000K balanced white LEDs

Dimensions: Ø83 x 103 mm  
Luminaire input power: 7 W  
Luminaire luminous flux: 409 lm  
Luminaire efficacy: 58 lm/W  
Weight: 1.03 kg



TLG\_CON3\_F\_XS.jpg

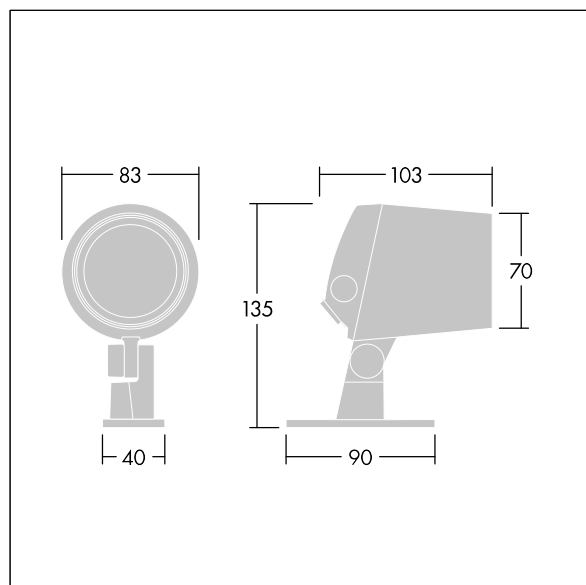

TLG\_CONL\_M\_4L.wmf

This product contains a light source of energy efficiency class F.