

ISO 9223 C3	PLUG X 11 *	ida DALI DIM APPROVED	IP66	IK09				T <sub>a</sub> 35	
----------------	----------------	--------------------------	------	------	--	--	--	-------------------	--

### Urba Deco

A smart, sophisticated architectural urban lantern with 48 LEDs driven at 350mA and a Wide Street Comfort (symmetrical) optic with no upward light. Electronic, fixed output control gear. Class II electrical, IP66, Impact strength: IK09. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Pre-wired with 1m cable. Suspended through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 146 mm

Luminaire input power: 49.1 W

Luminaire luminous flux: 7810 lm


Luminaire efficacy: 159 lm/W

Weight: 6.48 kg

Scx: 0.031 m<sup>2</sup>



TLG\_URBD\_F\_MSUPDB.jpg

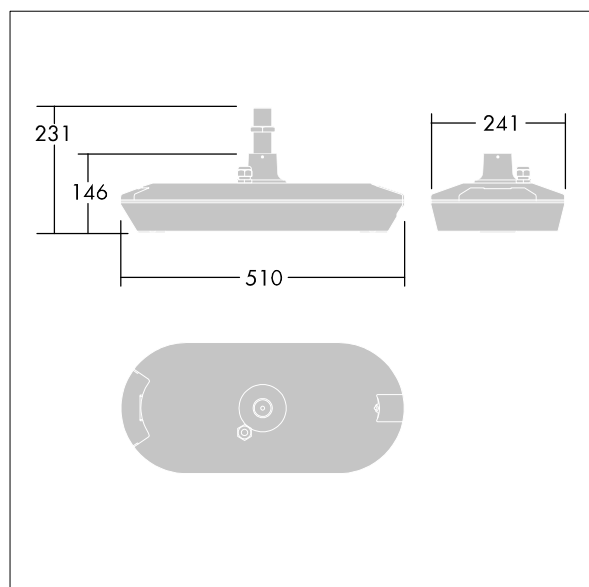

TLG\_URBD\_M\_MUS.wmf

**Urba Deco**

**96279225 UD 48L35-730 WSC-S CL2 WS1 MSU-T BK U0**

**THORN**