

ISO 9223 C3	PLUG X 11 *	ida DAK SKY APPROVED	IP66	IK09	⏏	⚡	⚙	T _a 35	
----------------	----------------	-------------------------	------	------	---	---	---	-------------------	--

Urba Deco

A smart, sophisticated architectural urban lantern with 48 LEDs driven at 350mA and a Wide Street Comfort (symmetrical) optic with no upward light. Electronic, fixed output control gear. Class I electrical, IP66, Impact strength: IK09. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Pre-wired with 1m cable. Suspended through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 146 mm

Luminaire input power: 49.1 W

Luminaire luminous flux: 7810 lm


Luminaire efficacy: 159 lm/W

Weight: 6.53 kg

Scx: 0.031 m²



TLG_URBD_F_MSUPDB.jpg

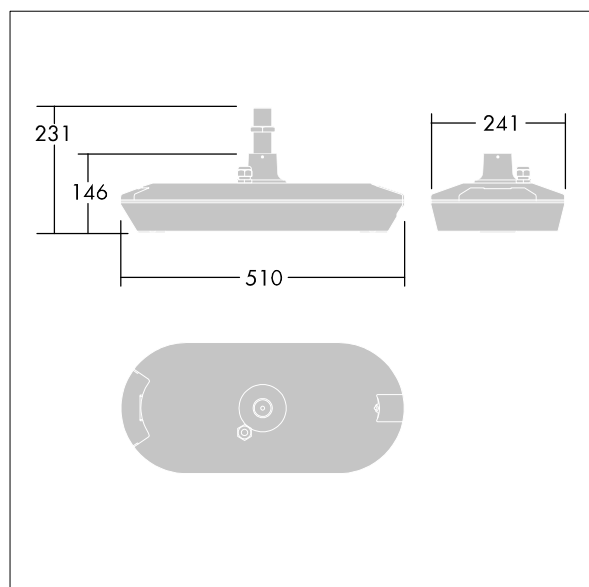

TLG_URBD_M_MUS.wmf

Urba Deco

96279226 UD 48L35-730 WSC-S CL1 WS1 MSU-T BK U0

THORN