

ISO 9223 C3	PLUG X 11	ida DAK SKY APPROVED	IP66	IK10				T <sub>a</sub> 35	
----------------	--------------	-------------------------	------	------	--	--	--	-------------------	--

### Urba Deco


A smart, sophisticated architectural urban lantern with 24 LEDs driven at 500mA and a Wide Street Comfort (symmetrical) optic with no upward light. Electronic, fixed output control gear. Class II electrical, IP66, Impact strength: IK10. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Pre-wired with 1m cable. Catenary mounted through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 266 mm  
 Luminaire input power: 37 W  
 Luminaire luminous flux: 5066 lm  
 Luminaire efficacy: 137 lm/W  
 Weight: 7.07 kg  
 Scx: 0.031 m<sup>2</sup>



TLG\_URBD\_F\_MCA.jpg

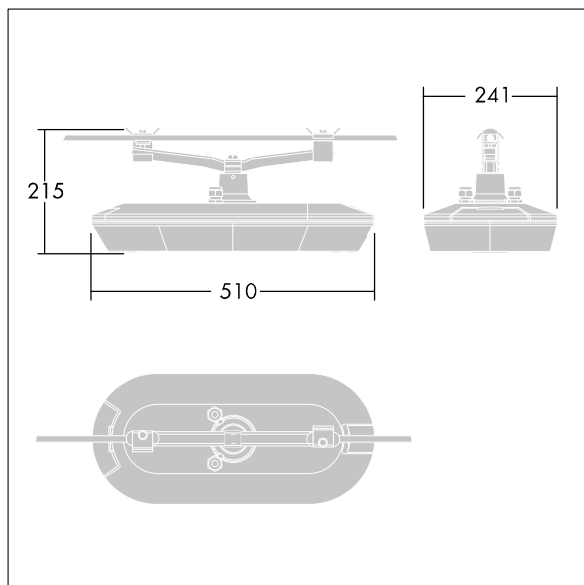

TLG\_URBD\_M\_CATENARY.wmf

**Urba Deco**

**96279233 UD 24L50 730 WSC-S CL2 WS1 MCA-T BK U0**

**THORN**