

# Royal Modular

THORN

96650248 ROYAL MOD LED2700-940 12X3 AH HFI FP

IP40



LED

## Royal Modular

An LED recessed luminaire, with air-handling functionality. Electronic, DALI-2 dimmable. Class II electrical, IP40. Body: painted steel. Diffuser: MicroPrismatic. Fitted with flex and plug. Complete with 4000K LED, Colour Rendering Index min.: 90

Type IC in accordance with AS/NZS 60598.2.2-2016 Recessed Luminaires.


Dimensions: 1195 x 295 x 41 mm

Luminaire input power: 22.9 W

Luminaire luminous flux: 2416 lm



TLG\_RYLM\_F\_RMAH01.jpg

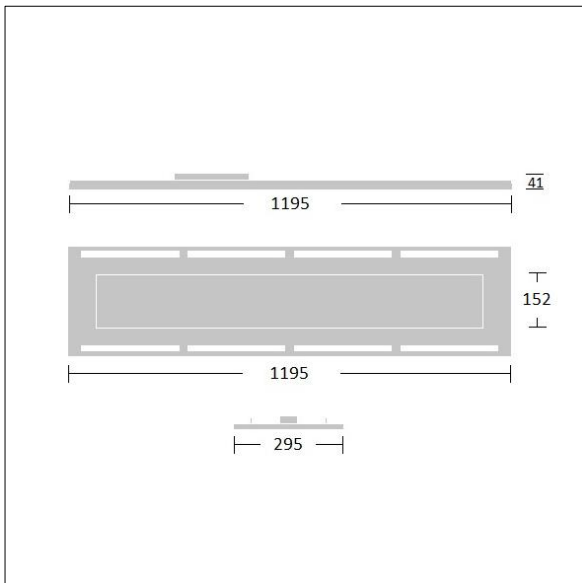

TLA\_SUSP\_M\_LD3.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Royal Modular

96650248 ROYAL MOD LED2700-940 12X3 AH HFI FP

THORN