# 96634347 <HIPAK LED30000-840 HFI-X RK GEN3 HE

| IP65 | D | IK08 | | | | 850°C | $T_a$ -30 +50 |
|---|---|---|---|---|---|---|---|

An IP65 single point suspension LED high bay luminaire with rack beam optic. DALI dimmable LED driver, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: die-cast aluminium. Lens/Diffuser: polycarbonate. Equipped with quick fit electrical connection.  Complete with 4000K LED.

Dimensions: Ø380 x 147 mm
Luminaire input power: 190 W
Luminaire luminous flux: 30115 lm
Luminaire efficacy: 159 lm/W
Weight: 4.8 kg

TLG_HIPK_F_3PDB.jpg

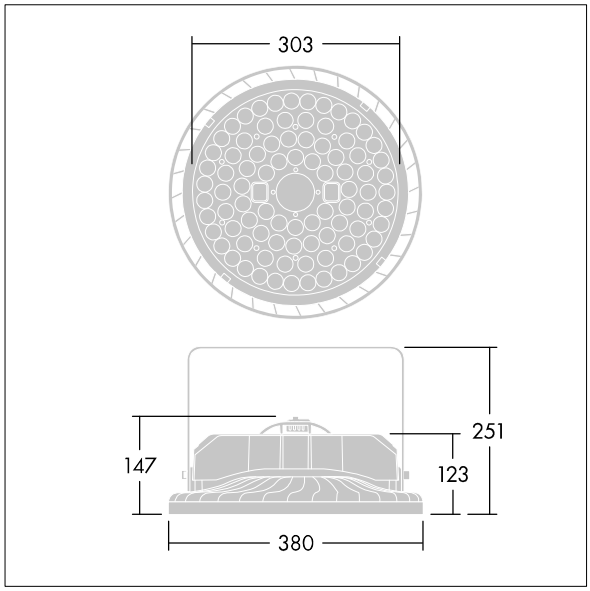


TLG_HIPK_M_3L.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime.  International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting