

# Champion Pro G3

THORN

26603602 GB CHAMP G3 IP66 432L230 240-415V CL1 D

RoHS	IP66			T <sub>a</sub> -20 +45	
------	------	---	---	---------------------------	--

## Champion Pro G3


IP66 DALI electronic gear box for Champion Pro G3 432L. To be installed remotely. Class I electrical, with 10kV surge protection. Nominal input voltage: 200-480V AC. Output wattage: W. Electrical connections via screw terminals. A single 7 core cable is required for the connection between floodlight and control gear (not supplied).

Housing: aluminium enclosure painted silver grey (RAL 9007).

Weight: 15.8 kg



TLG\_CHPP\_F\_G3GB.jpg

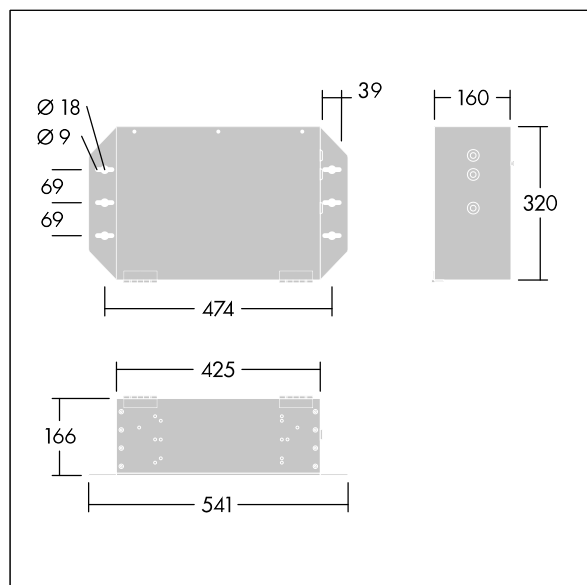

TLG\_CHPP\_M\_G3GB2\_3.wmf

All values marked with an \* are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting