

Champion Pro G3

THORN

26603600 GB CHAMP G3 IP66 144L230 240-415V CL1 D

RoHS	IP66			T _a -20 +45	
------	------	---	---	---------------------------	--

Champion Pro G3


IP66 DALI electronic gear box for Champion Pro G3 144L. To be installed remotely. Class I electrical, with 10kV surge protection. Nominal input voltage: 200-480V AC. Output wattage: W. Electrical connections via screw terminals. A single 3 core cable is required for the connection between floodlight and control gear (not supplied).

Housing: aluminium enclosure painted silver grey (RAL 9007).

Weight: 8.2 kg



TLG_CHPP_F_G3GB.jpg

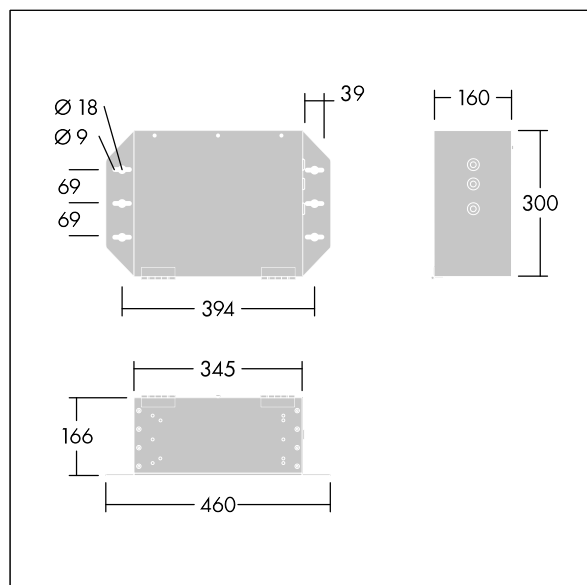

TLG_CHPP_M_G3GB1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting