

Indilouver Pro

THORN

96650816 INDI PRO LED1600-940 6x3 AH HFI FP

| | | | | | | | |
|------|------|------|---|---|--------|---------------------------|--|
| RoHS | IP20 | IK02 |  |  | 750 °C | T _a -20 +40 | |
|------|------|------|---|---|--------|---------------------------|--|


Indilouver Pro

A stylish ceiling recessed LED luminaire. DALI-2 dimmableLED driver. Class I electrical, IP20, Impact strength: IK02. Body: white painted steel, with option for concealed air return. Diffuser: 2mm thick, clear PMMA, linear profile. Baffle: aluminium extrusion. Fitted with flex and plug. Complete with 4000K LED, COI approved.

Dimensions: 595 x 295 x 76 mm
Luminaire input power: 17 W
Luminaire luminous flux: 1623 lm
Luminaire efficacy: 95 lm/W
Weight: 3 kg



TLG_INPR_F_WH.jpg

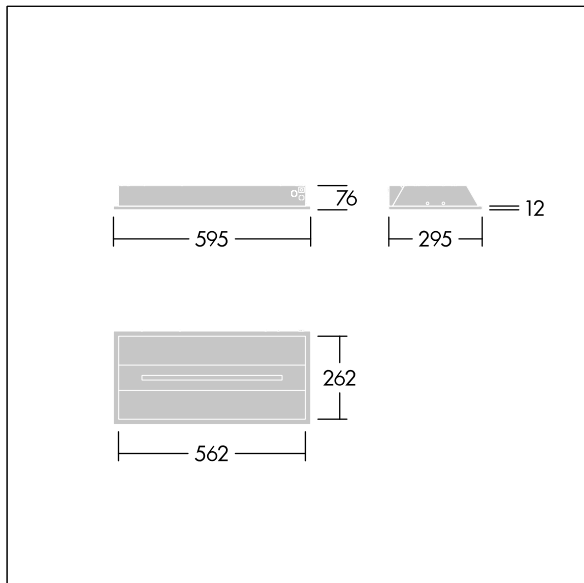

TLG_INPR_M_S.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Indilouver Pro

96650816 INDI PRO LED1600-940 6x3 AH HFI FP

THORN