

# Indilouver Pro

THORN

96650874 INDI PRO LED1600-927-65 6X3 AH HFI FP

RoHS	IP20	IK02			750°C	T <sub>a</sub> -20 +40	
------	------	------	---	---	-------	---------------------------	--


## Indilouver Pro

A stylish ceiling recessed LED luminaire. DALI-2 dimmableLED driver. Class I electrical, IP20, Impact strength: IK02. Body: white painted steel, with option for concealed air return. Diffuser: 2mm thick, clear PMMA, linear profile. Baffle: aluminium extrusion. Fitted with flex and plug. Complete with 2700-6500K tuneable LED, COI approved.

Dimensions: 595 x 295 x 76 mm  
Luminaire input power: 17 W  
Luminaire luminous flux: 1651 lm  
Luminaire efficacy: 97 lm/W  
Weight: 0 kg



TLG\_INPR\_F\_WH.jpg

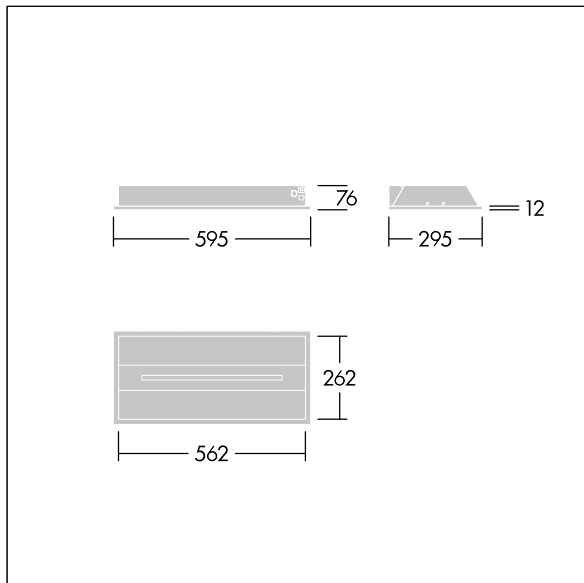

TLG\_INPR\_M\_S.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Indilouver Pro

96650874 INDI PRO LED1600-927-65 6X3 AH HFI FP

THORN