

## Indilouver Pro

96650875 INDI PRO LED2700-927-65 12X3 AH HFI FP

RoHS	IP20	IK02			750 °C	T <sub>a</sub> -20 +40
------	------	------	--	--	--------	---------------------------


### Indilouver Pro

A stylish ceiling recessed LED luminaire. DALI-2 dimmable LED driver. Class I electrical, IP20, Impact strength: IK02. Body: white painted steel, with option for concealed air return. Diffuser: 2mm thick, clear PMMA, linear profile. Baffle: aluminium extrusion. Fitted with flex and plug. Complete with 2700-6500K tuneable LED, COI approved.

Dimensions: 1195 x 295 x 76 mm  
 Luminaire input power: 27 W  
 Luminaire luminous flux: 2988 lm  
 Luminaire efficacy: 111 lm/W  
 Weight: 0 kg



TLG\_INPR\_F\_WH.jpg

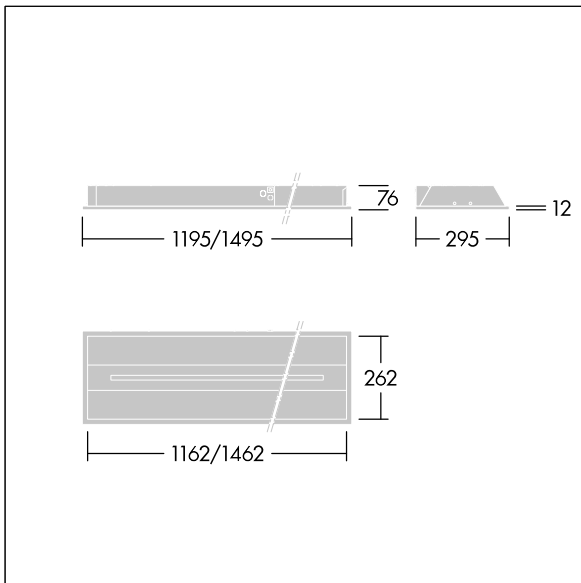

TLG\_INPR\_M\_M-L.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

# Indilouver Pro

96650875 INDI PRO LED2700-927-65 12X3 AH HFI FP

THORN