

RoHS	T <sub>a</sub> 0 +40	IP65	IK08	⏚	⚠	☀	⚙	750°C	
------	-------------------------	------	------	---	---	---	---	-------	--

### WeatherForce

A wide body, linear, water resistant LED luminaire, specifically designed for general outdoor applications. DALI dimmable LED driver with 2 hour, manual test, emergency lighting circuit. Class I electrical, IP65, Impact strength: IK08. Body: light grey injection moulded polycarbonate, supplied with tamper resistant screws. Diffuser: opal polycarbonate. Gear Tray: sheet steel, powder coated white. WeatherForce G2 is able to be surface mounted or suspended. Complete with switchable light colour temperature 3000K - 4000K - 5700K LED.

Emergency classification in accordance with AS/NZS 2293, C0 = D50, C90 = D32


Dimensions: 1270 x 150 x 110 mm

Luminaire input power: 52 W

Weight: 3.25 kg



TLG\_WFG2\_F\_L12.jpg

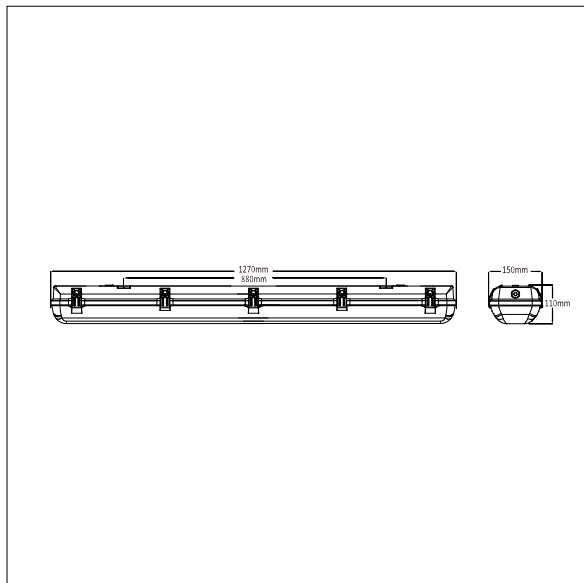

TLG\_WFG2\_M\_L12.wmf